
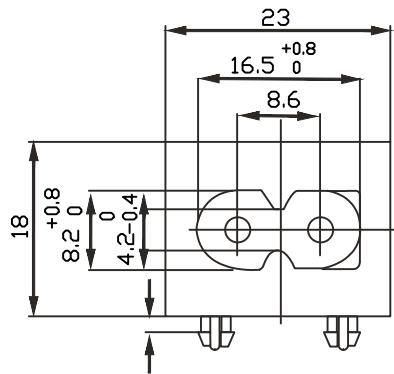



PANEL CUT-OUT

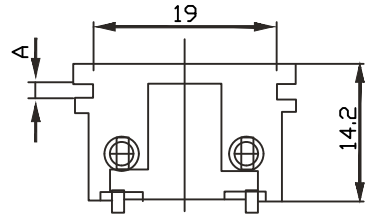

PCB LAYOUT

Material:
 Material(External): Nylon PA66 PC
 Rating Voltage: 250V 10A
 Humidity: 93%+40
 Insulation: $\geq 100M\Omega$
 Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:
 Conduct Material: COPPER
 Temperature Range: $-40^{\circ}C+70^{\circ}C$
 Contact Resistance: $\leq 0.03\Omega$
 Actuating Force: 5-40N
 Lifespan: 10000times

CODE	DIMENSION	MODEL
D	Non	1V
	1.3	1W
	1V	1

CODE	DIMENSION
A	0.8
	1
	1.5
	2

ORDER INFORMATION
 Product NO.: RHTAYS-222-2

AC Socket



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

AC Power Sockets*AC Plugs	
THIRD ANGLE PROJECTION	RHTAYS-222-2