

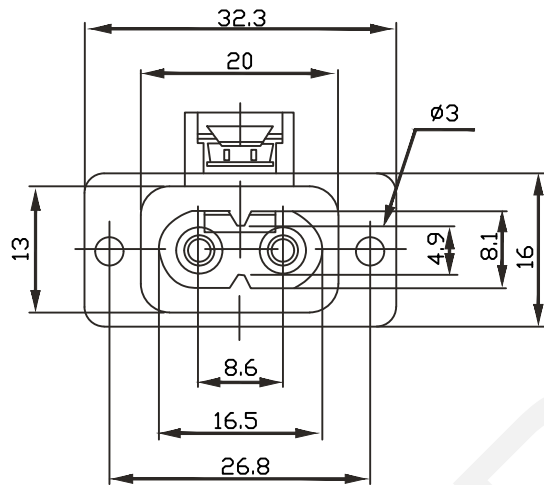


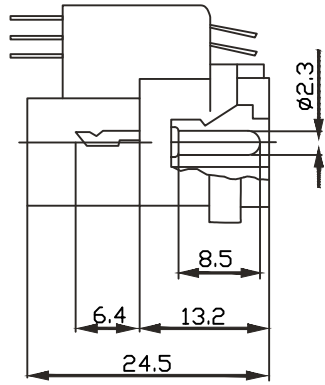

Panel
cut-out

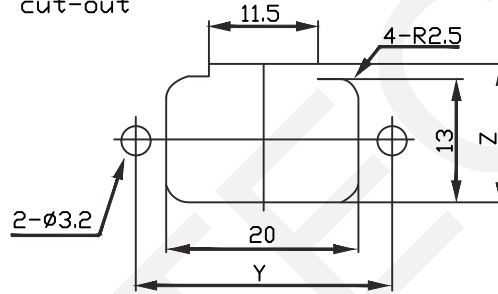

X	Y	Z
0.75~1.25	26.8+0.1	14.5+0.1
1.25~2.00	26.8+0.1	14.5+0.1
2.00~3.00	26.8+0.1	14.5+0.1

X:Panel Thickness

Material:

Material(External): Nylon PA66 PC

Rating Voltage: 250V 10A

Humidity: 93%+40

Insulation: $\geq 100M\Omega$

Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:

Conduct Material: COPPER

Temperature Range: $-40^{\circ}C+70^{\circ}C$

Contact Resistance: $\leq 0.03\Omega$

Actuating Force: 5-40N

Lifespan: 10000times

ORDER INFORMATION

Product NO: RHTAYS-222-24

AC Socket



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

AC Power Sockets*AC Plugs

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAYS-222-24