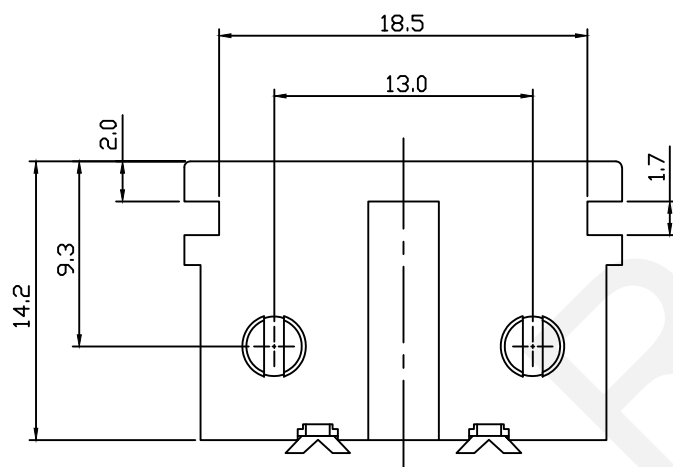
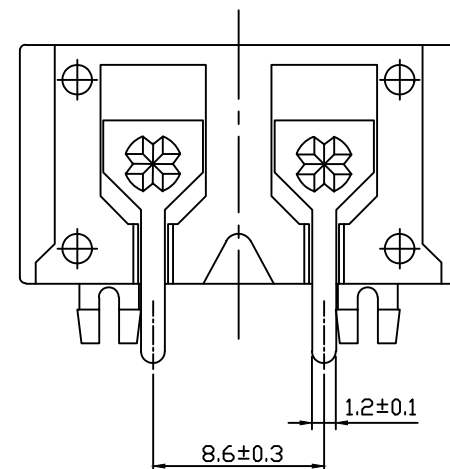
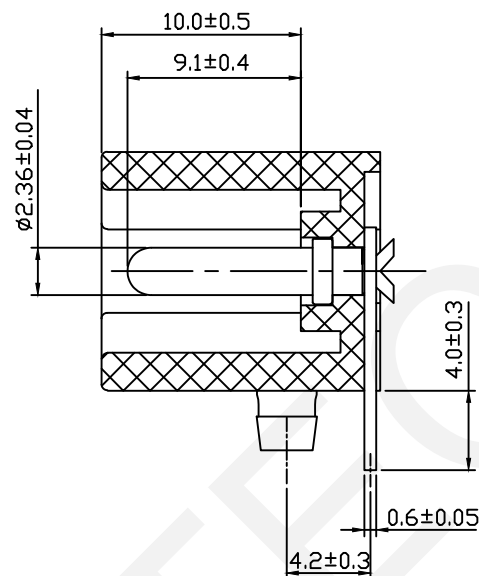
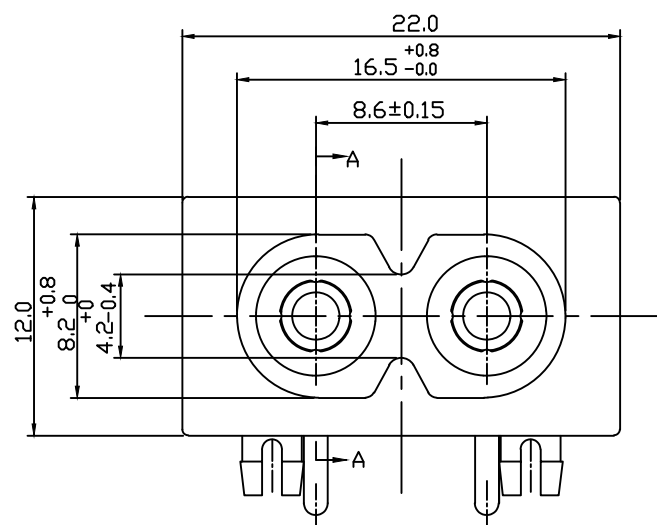


PCB LAYOUT

Material:

Rating: 7A 150VAC UL

2.5A 250V AC 3C KC TUV CE

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: ≥80N

Operating Life: ≥5000 cycles

Withstand Voltage:

Between all terminals: 2500VAC(50-60Hz)/min

Terminals to base: 3750V AC(50-60Hz)/min

Leakage Current: 1mA

Insulation Resistance: ≥100MΩ 500V DC

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

AC Inlet

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAYS-222-3


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9