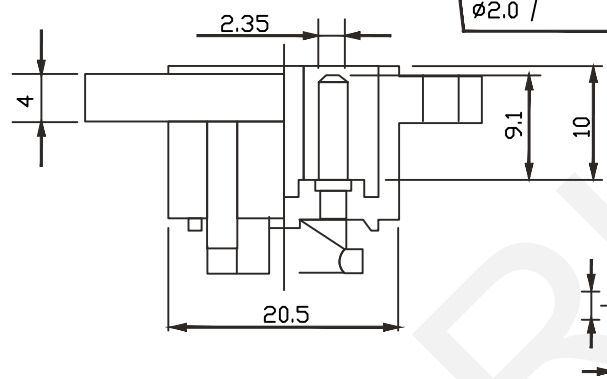
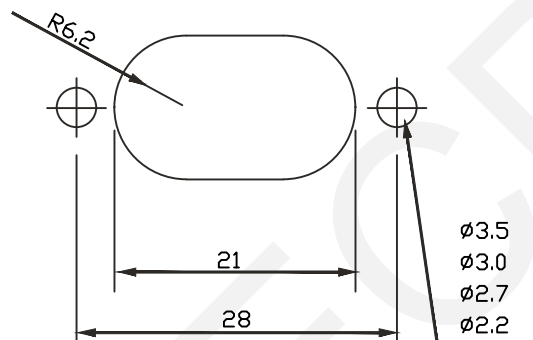
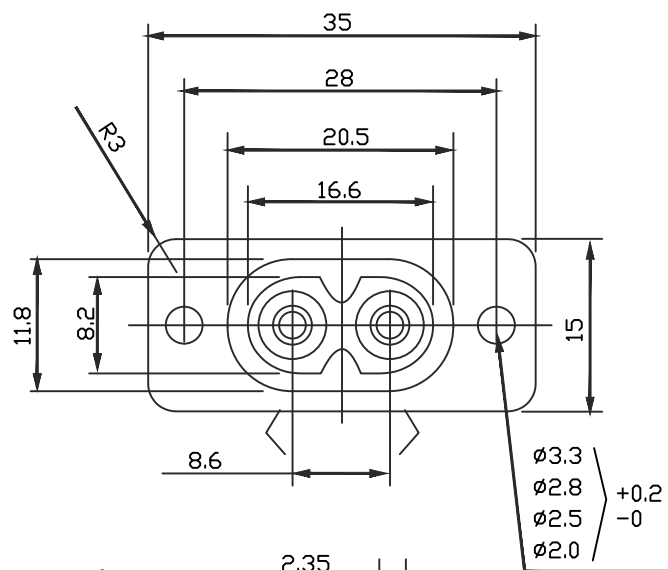


Material:  
 Material(External): Nylon PA66 PC  
 Rating Voltage: 250V 10A  
 Humidity: 93%+40  
 Insulation:  $\geq 100M\Omega$   
 Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:  
 Conduct Material: COPPER  
 Temperature Range:  $-40^{\circ}C+70^{\circ}C$   
 Contact Resistance:  $\leq 0.03\Omega$   
 Actuating Force: 5-40N  
 Lifespan: 10000times

ORDER INFORMATION  
 Product NO.: RHTAYS-222-34

AC Socket

**RHTECP**® NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm | SHEET SIZE: A4 |       | SCALE:--- |
|----------|----------------|-------|-----------|
| 0~3      | 3~18           | 18~50 | 50~120    |
| ±0.12    | ±0.15          | ±0.3  | ±0.5      |

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

AC Power Sockets\*AC Plugs

THIRD ANGLE PROJECTION

RHTAYS-222-34