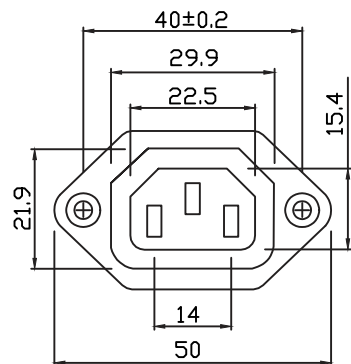


SPECIFICATION:

Current Rating: 250V AC 10A

Contact Resistance: 30mΩ Max

Insulator Resistance: 100mΩ Min. at DC 500V

Dielectric withstand Strength test: 2000VAC/1 minute
between each terminals

Insertion and Removal force: 5~40N




Operating Temperature: -45°C~+105°C

Electrical Life: 5000 cycles Min.

Material:

Housing Material: PBT UL94V-0 or PA66/PC UL94V-0

Terminal: Brass ,plating Ni.

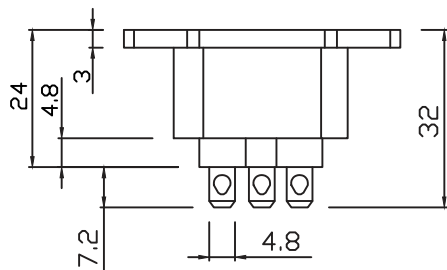

ORDER INFORMATION

Product NO: RHTAYS-302-1

AC INLET TYPE

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

IEC AC INLET Series

THIRD ANGLE PROJECTION



RHTAYS-302-1