

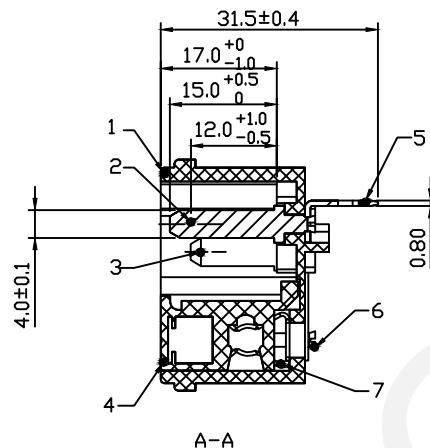
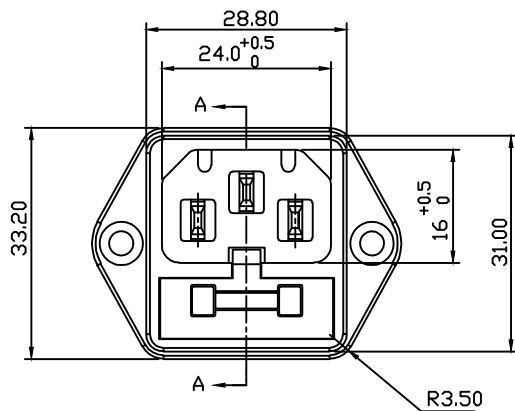
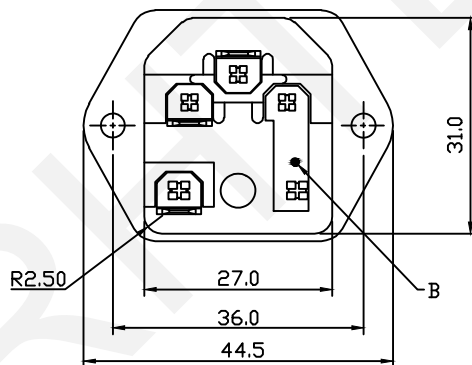


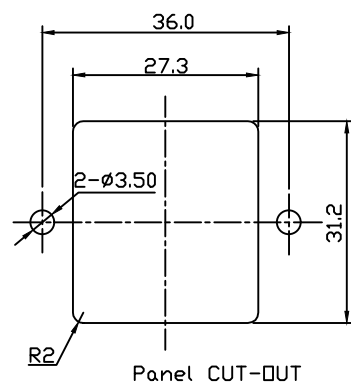

Fuse	Sper
	1A
	2A
	3.15A
	5A
	10A
	15A
	Customized

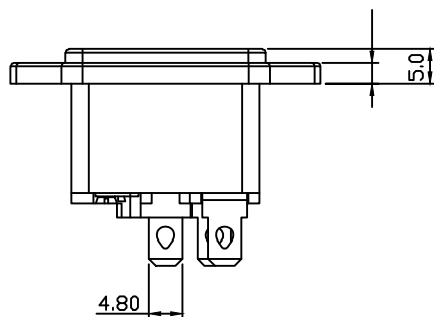

Material:

- 1.Base:PA66
- 2.Grounding pin:Brass t2.0,Ni Plating
- 3.Current-carrying pin:Brass t2.0,Ni Plating
- 4.Safety Cover:PA66
- 5.Quick Connect Terminal:Brass t0.8, Tin Plating
- 6.Rivet:Brass t2.0,Ni Plating
- 7.Aafety Clip:Brass t2.0,Ni Plating
- 8.Connecting Piece:Brass t0.5,Ni Plating

Electrical:

Standard:IEC 60320-1,GB/T 17465.1
 Rating Voltage:250V/AC 10A 3C TUV CE KC
 Fuse:250V AC 6.3A 2.5W
 Withstand Voltage
 Between All Terminals:2500VAC(50-60Hz)1 min
 Terminals To Base:3750VAC(50-60Hz)1 min
 Leakage Current:1mA
 Insulation Resistance:≥100MΩ 500V DC
 Glow-Wire Tep:750°C

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

C14 AC Power Sockets

THIRD ANGLE PROJECTION



RHTAYS-301-11