
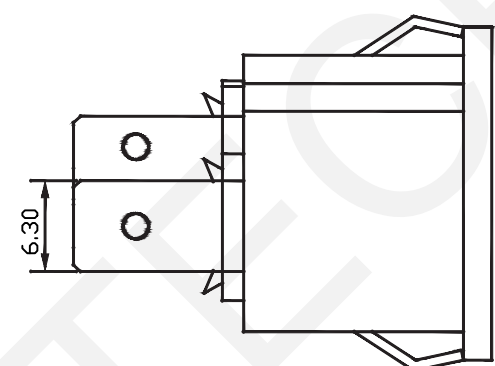


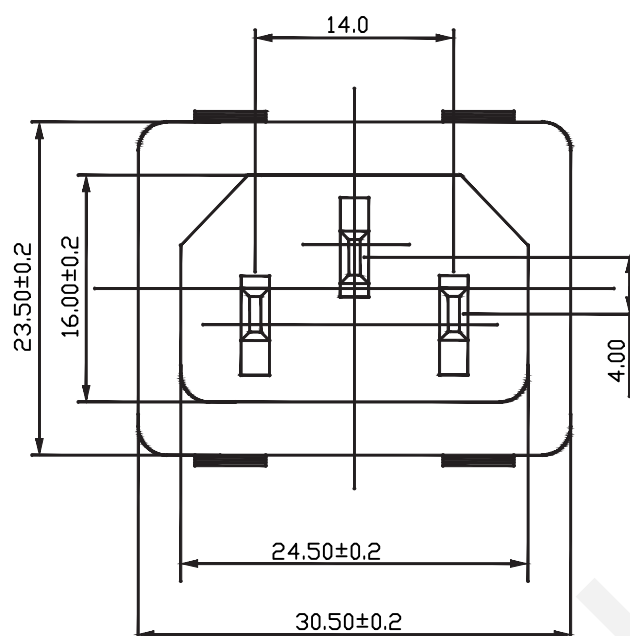

Material:  
Material(External): Nylon PA66 PC  
Rating Voltage: 250V 10A  
Humidity: 93%+40  
Insulation:  $\geq 100M\Omega$   
Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:  
Conduct Material: COPPER  
Temperature Range:  $-40^{\circ}C+70^{\circ}C$   
Contact Resistance:  $\leq 0.03\Omega$   
Actuating Force: 5-40N  
Lifespan: 10000times

ORDER INFORMATION  
Product NO.: RHTAYS-301-3A  
AC Socket

|          |                |       |           |               |                                                                                                                 |                           |  |
|----------|----------------|-------|-----------|---------------|-----------------------------------------------------------------------------------------------------------------|---------------------------|--|
| UNITS:mm | SHEET SIZE: A4 |       | SCALE:--- |               | DRWN BY PAN                                                                                                     | AC Power Sockets*AC Plugs |  |
| 0~3      | 3~18           | 18~50 | 50~120    | CHK'D BY FENG | THIRD ANGLE PROJECTION<br> | RHTAYS-301-3A             |  |
| ±0.12    | ±0.15          | ±0.3  | ±0.5      | APPR BY ZHAN  |                                                                                                                 |                           |  |