




PANEL CUT-OUT

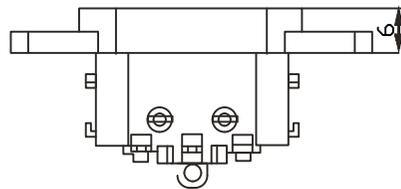

C=14:PCB LAYOUT



C=18:PCB LAYOUT

Material:

Material(External): Nylon PA66 PC

Rating Voltage: 250V 10A

Humidity: 93%+40

Insulation: $\geq 100M\Omega$

Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:

Conduct Material: COPPER

Temperature Range: $-40^{\circ}C+70^{\circ}C$

Contact Resistance: $\leq 0.03\Omega$

Actuating Force: 5-40N

Lifespan: 10000times

CODE	THICKNESS
B	3.5
	5
	10.5

ORDER INFORMATION

Product NO.: RHTAYS-305-11

AC Socket

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

± 0.12 ± 0.15 ± 0.3 ± 0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

AC Power Sockets*AC Plugs

THIRD ANGLE PROJECTION



RHTAYS-305-11