

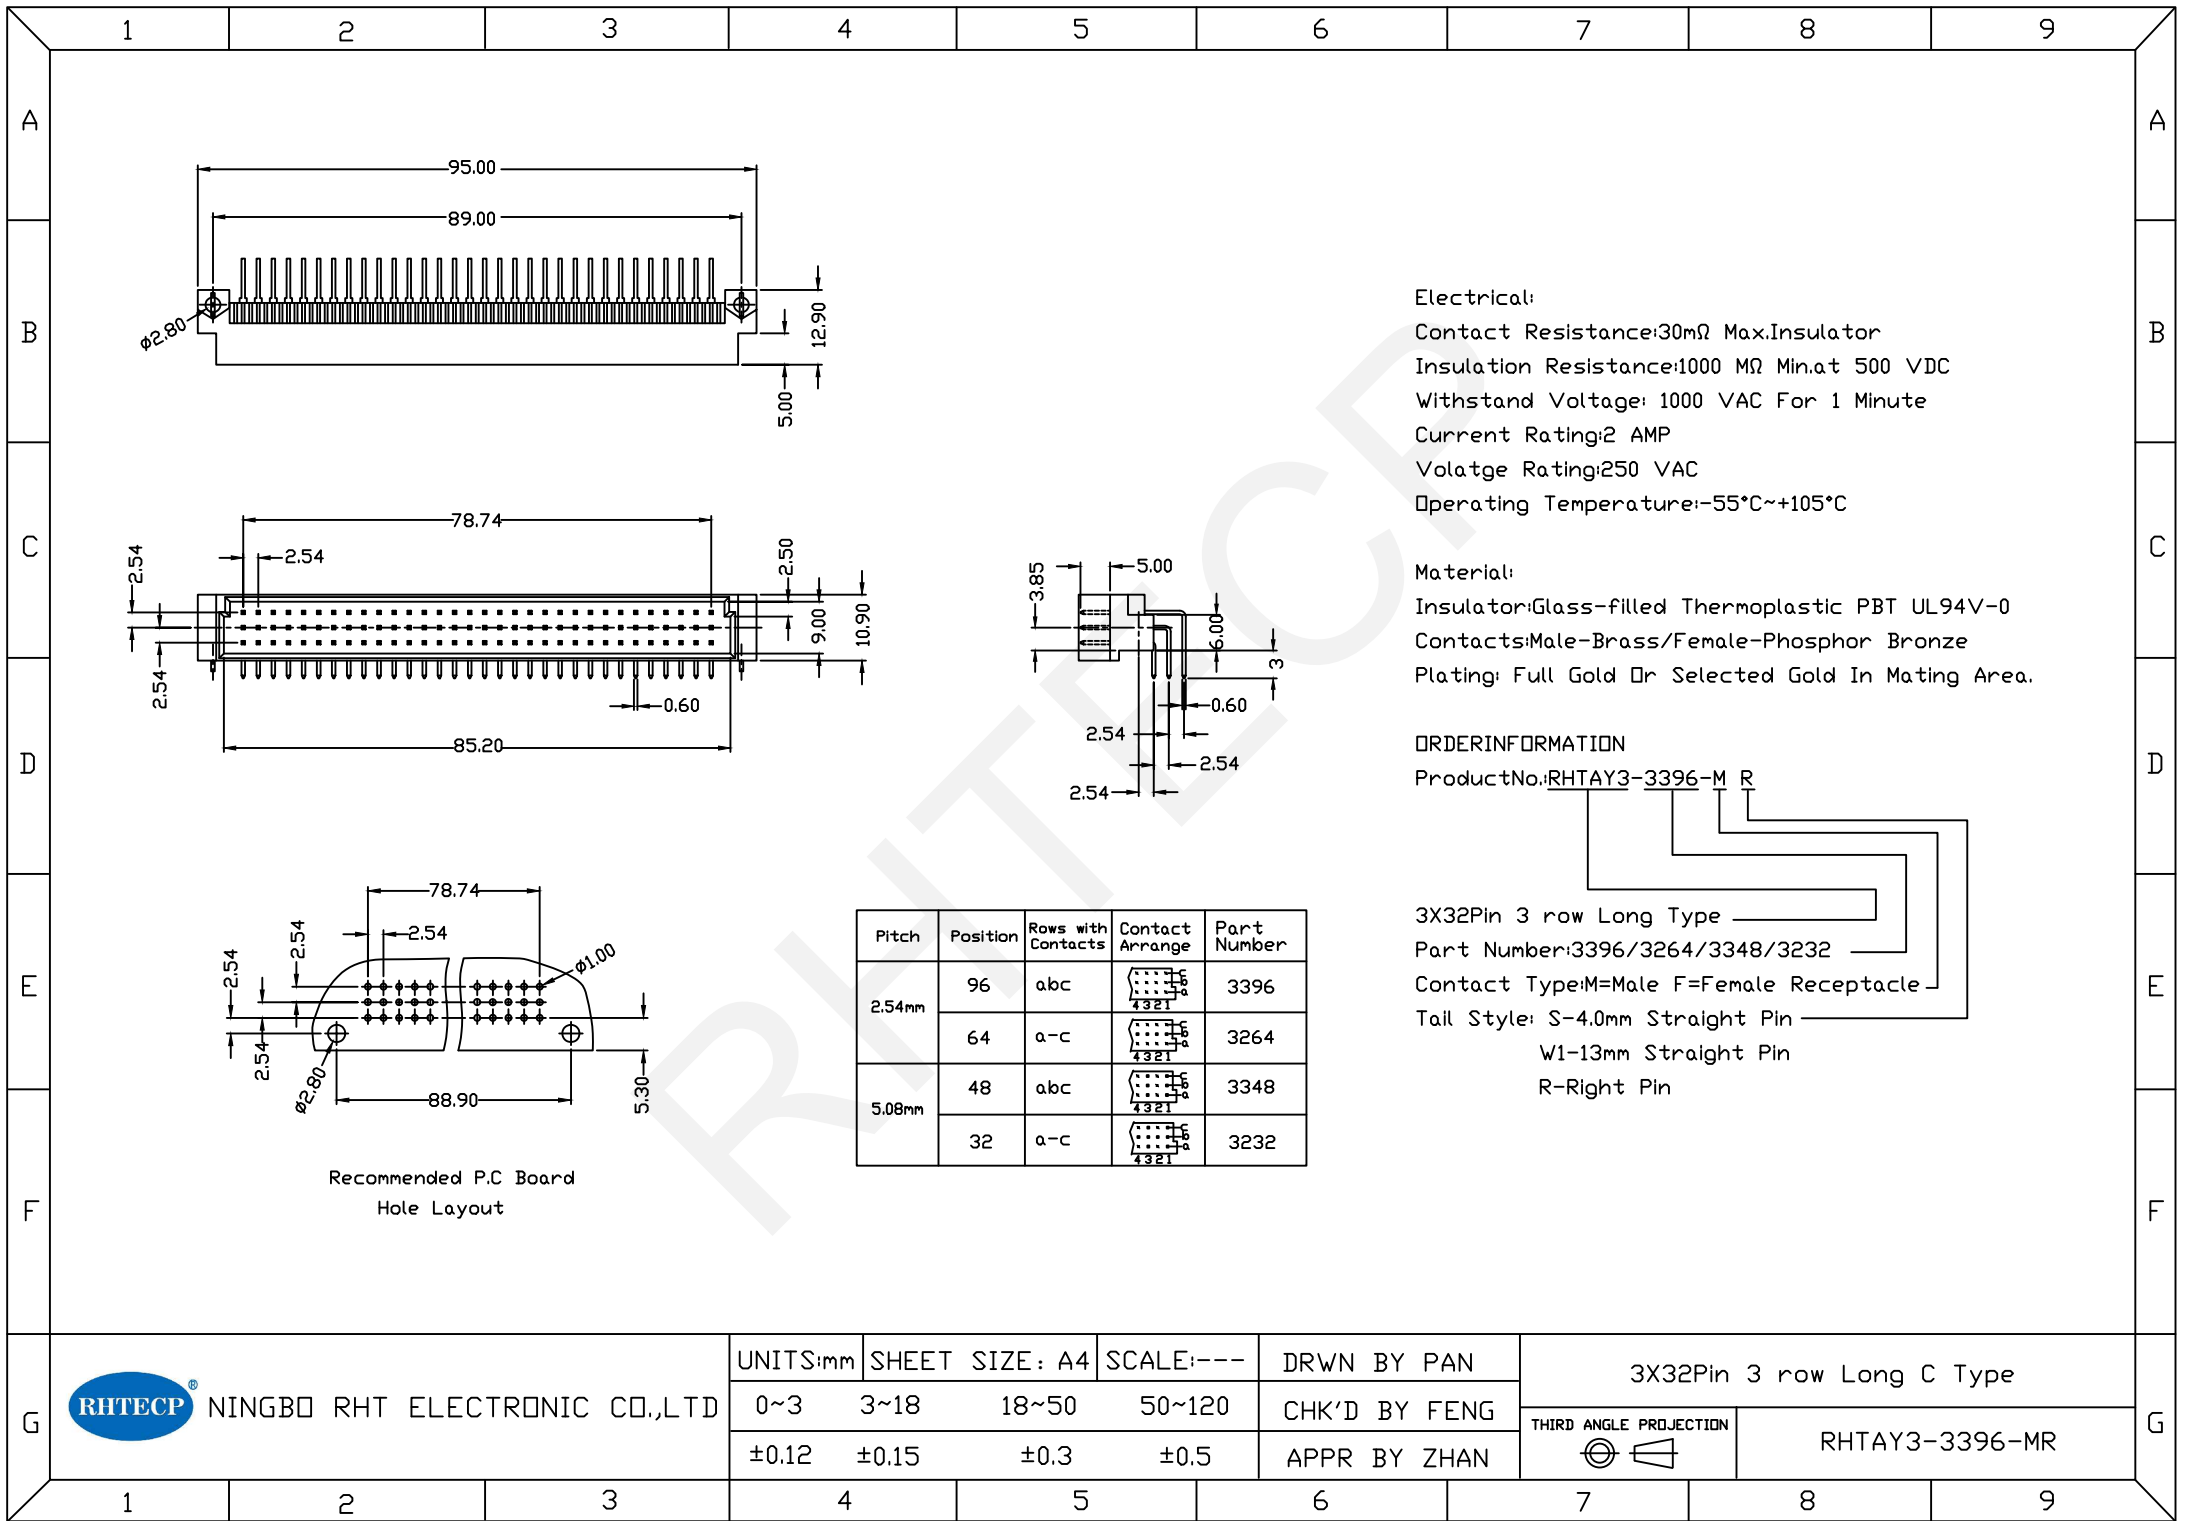
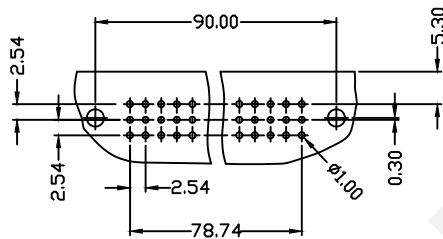



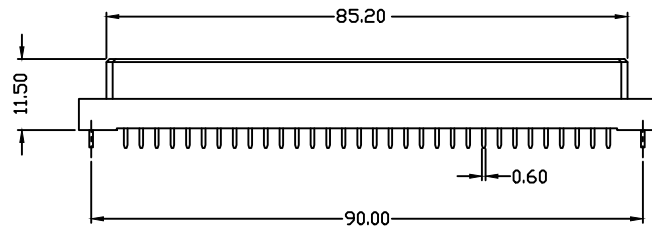

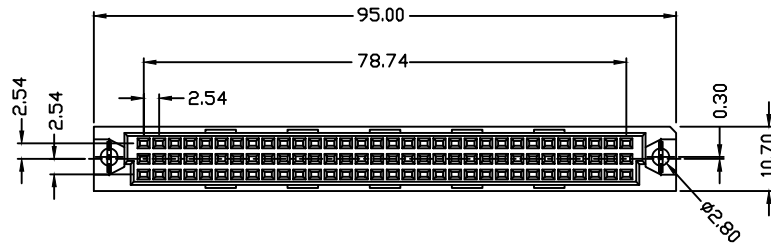

Recommended P.C Board
Hole Layout

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	abc		3396
	64	a-c		3264
5.08mm	48	abc		3348
	32	a-c		3232

Electrical:

Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Voltage Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY3-3396-F S

3X32Pin 3 row Long Type

Part Number:3396/3264/3348/3232

Contact Type:M=Male F=Female Receptacle

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---


DRWN BY PAN

CHK'D BY FENG





APPR BY ZHAN

3X32Pin 3 row Long C Type

THIRD ANGLE PROJECTION



RHTAY3-3396-FS

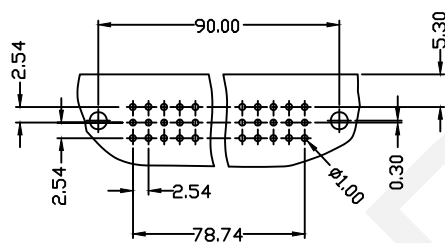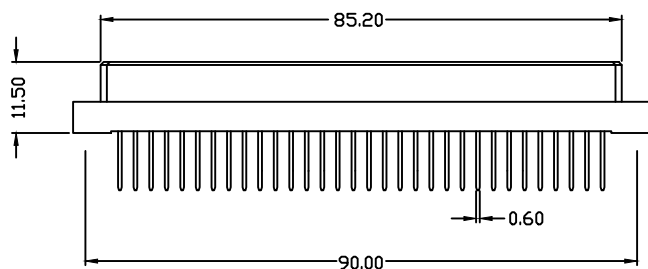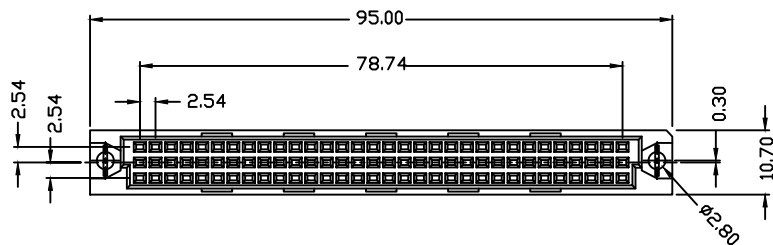

Recommended P.C Board
Hole Layout

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	abc		3396
	64	a-c		3264
5.08mm	48	abc		3348
	32	a-c		3232

Electrical:

Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Voltage Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY3-3396-F W1

3X32Pin 3 row Long Type
Part Number:3396/3264/3348/3232
Contact Type:M=Male F=Female Receptacle
Tail Style: S-4.0mm Straight Pin
W1-13mm Straight Pin
R-Right Pin



NINGBO RHT ELECTRONIC CO.,LTD





UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

3X32Pin 3 row Long C Type



RHTAY3-3396-FW1

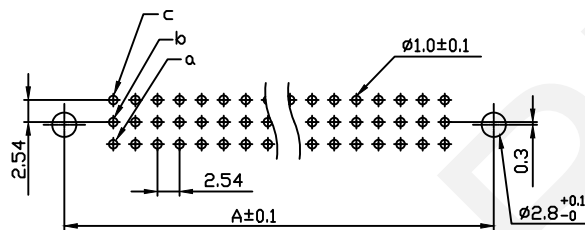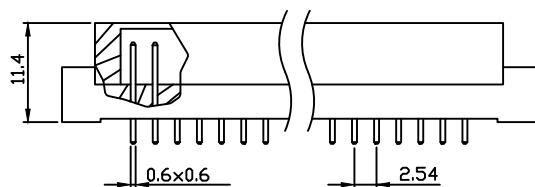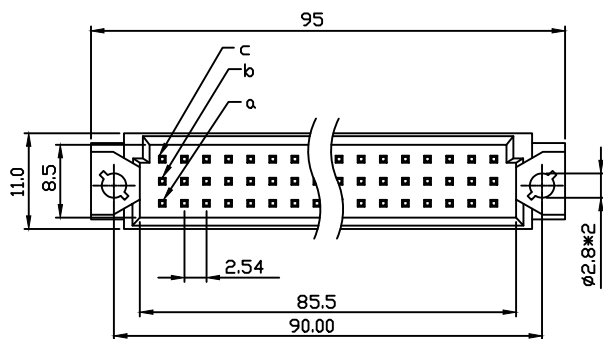

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES:±0.10mm

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	abc		3396
	64	a-c		3264
5.08mm	48	abc		3348
	32	a-c		3232

Electrical:

Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Voltage Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY3-3396-M S

3X32Pin 3 row Long Type

Part Number:3396/3264/3348/3232

Contact Type:M=Male F=Female Receptacle

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG




APPR BY ZHAN

3X32Pin 3 row Long R Type

THIRD ANGLE PROJECTION



RHTAY3-3396-MS

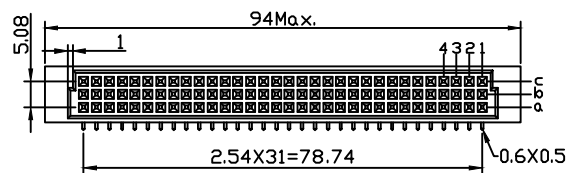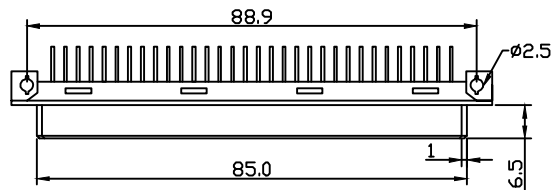

Electrical:

Contact Resistance: 30mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55°C ~ +105°C


Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
Contacts: Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY3-3396-F R

3X32Pin 3 row Long Type
Part Number: 3396/3264/3348/3232
Contact Type: M=Male F=Female Receptacle
Tail Style: S-4.0mm Straight Pin
W-13mm Straight Pin
R-Right Pin

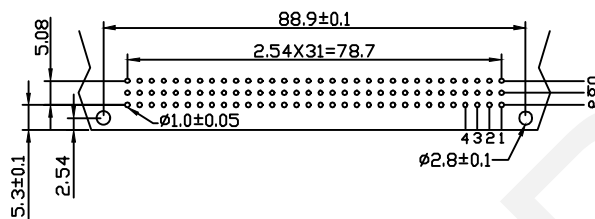

P.C Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	abc		3396
	64	a-c		3264
5.08mm	48	abc		3348
	32	a-c		3232

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG





APPR BY ZHAN

3X32Pin 3 row Long R Type

THIRD ANGLE PROJECTION



RHTAY3-3396-FR

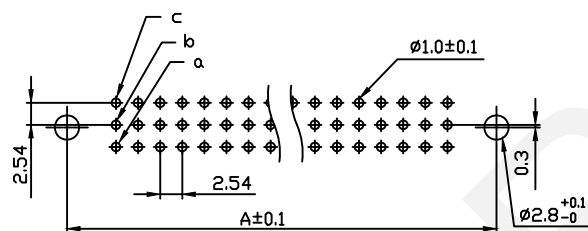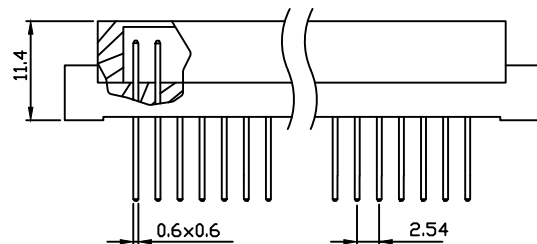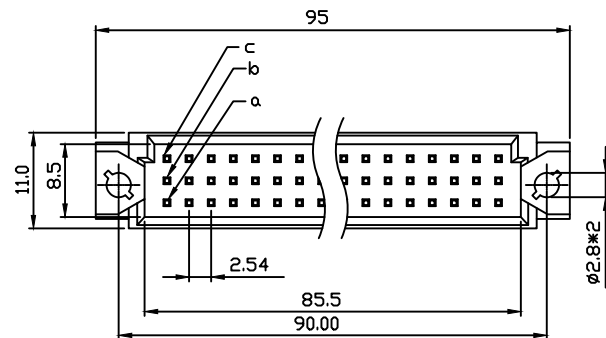

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES:±0.10mm

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	96	abc		3396
	64	a-c		3264
5.08mm	48	abc		3348
	32	a-c		3232

Electrical:

Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Voltage Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY3-3396-M W1

3X32Pin 3 row Long Type
Part Number:3396/3264/3348/3232
Contact Type:M=Male F=Female Receptacle
Tail Style: S-4.0mm Straight Pin
W1-13mm Straight Pin
R-Right Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

3X32Pin 3 row Long R Type



RHTAY3-3396-MW1