

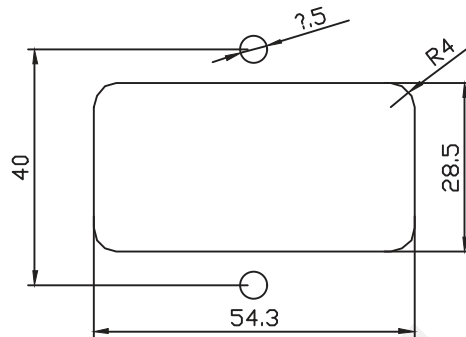
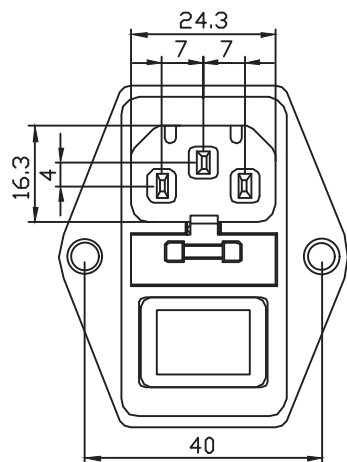


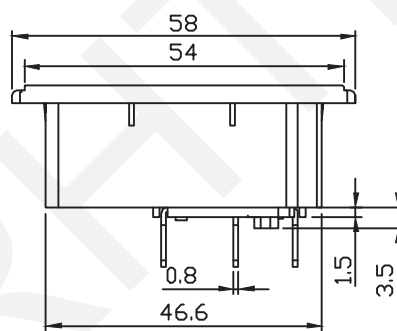

CUT-OUT



SPECIFICATION:

Current Rating: 250V AC 10A

Contact Resistance: 30mΩ Max

Insulator Resistance: 100mΩ Min. at DC 500V

Dielectric withstand Strength test: 2000VAC/1 minute
between each terminals

Insertion and Removal force: 5~40N

Operating Temperature: -45°C~+105°C

Electrical Life: 5000 cycles Min.

Material:

Housing Material: PBT UL94V-0 or PA66/PC UL94V-0

Terminal: Brass ,plating Ni.



ORDER INFORMATION

Product NO.: RHTAYS-303-1

AC INLET TYPE



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

IEC AC INLET With Fuse+Rocker Switch Series

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYS-303-1