


SPECIFICATION:

Current Rating: 250V AC 10A
 Contact Resistance: 30mΩ Max
 Insulator Resistance: 100mΩ Min. at DC 500V
 Dielectric withstand Strength test: 2000VAC/1 minute between each terminals
 Insertion and Removal force: 5~40N
 Operating Temperature: -45°C~+105°C
 Electrical Life: 5000 cycles Min.

Material:



Housing Material: PBT UL94V-0 or PA66/PC UL94V-0
 Terminal: Brass ,plating Ni.

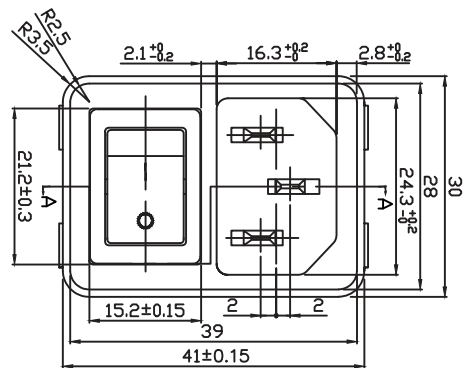

ORDER INFORMATION

Product NO.: RHTAYS-303-2

AC INLET TYPE

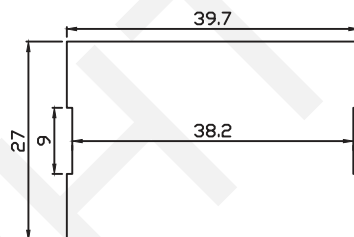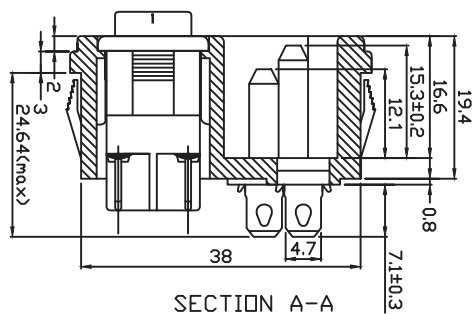

Mounting Hole
 Panel Thickness: 0.8-2.0mm

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

IEC AC INLET With Rocker Switch Series
 THIRD ANGLE PROJECTION
 RHTAYS-303-2