
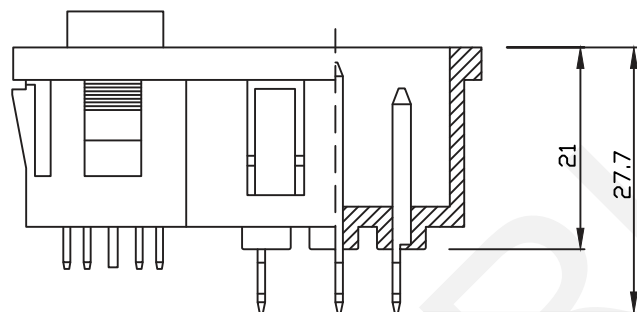



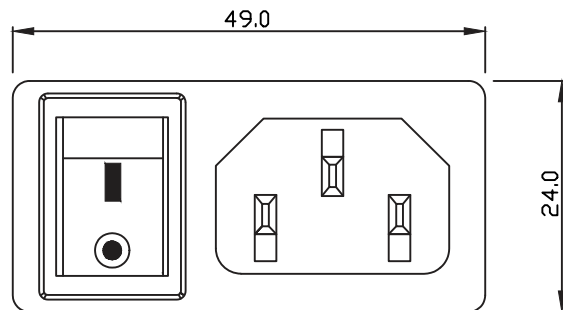

SPECIFICATION:

Current Rating: 250V AC 10A

Contact Resistance: 30mΩ Max

Insulator Resistance: 100mΩ Min. at DC 500V

Dielectric withstand Strength test: 2000VAC/1 minute
between each terminals

Insertion and Removal force: 5~40N

Operating Temperature: -45°C~+105°C

Electrical Life: 5000 cycles Min.

Material:

Housing Material: PBT UL94V-0 or PA66/PC UL94V-0

Terminal: Brass ,plating Ni.



ORDER INFORMATION

Product NO.: RHTAYS-303-3

AC INLET TYPE

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

IEC AC INLET With Rocker Switch Series

THIRD ANGLE PROJECTION



RHTAYS-303-3