
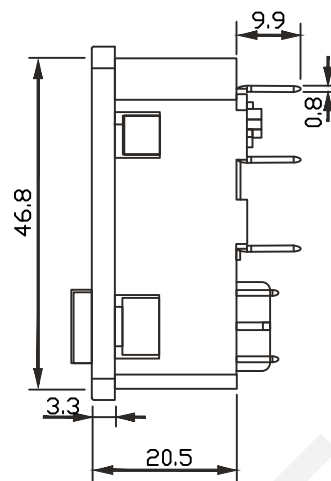
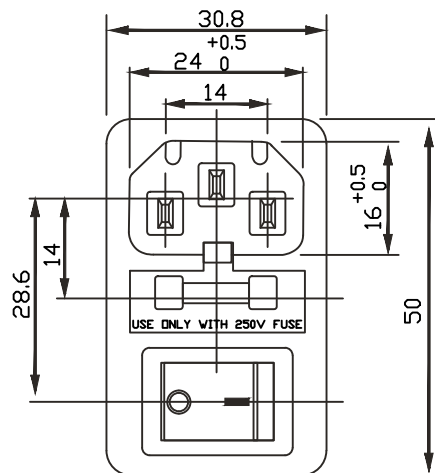


PANEL CUT-OUT



Material:
Material(External): Nylon PA66 PC
Rating Voltage: 250V 10A
Humidity: 93%+40
Insulation: $\geq 100M\Omega$
Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:
Conduct Material: COPPER
Temperature Range: $-40^{\circ}C+70^{\circ}C$
Contact Resistance: $\leq 0.03\Omega$
Actuating Force: 5-40N
Lifespan: 10000times

ORDER INFORMATION
Product NO.: RHTAYS-303-4

AC Socket

CODE	THICKNESS
A	1.0
	1.2
	1.5
	2.0
	3.0

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

AC Power Sockets*AC Plugs

THIRD ANGLE PROJECTION

RHTAYS-303-4