
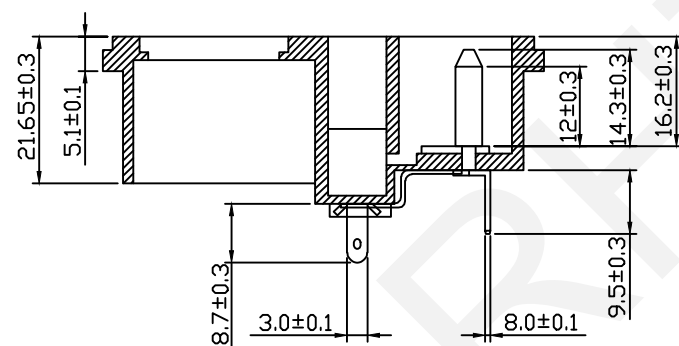
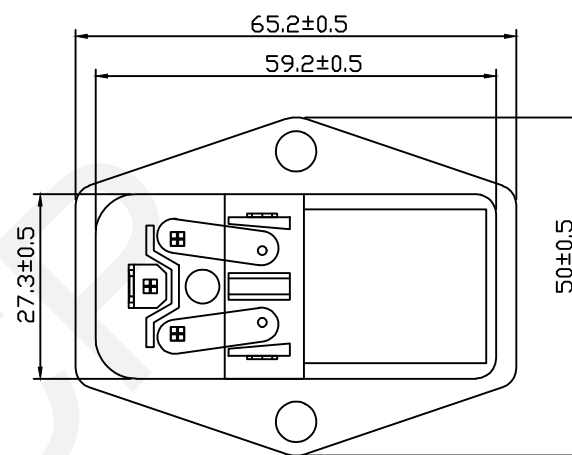



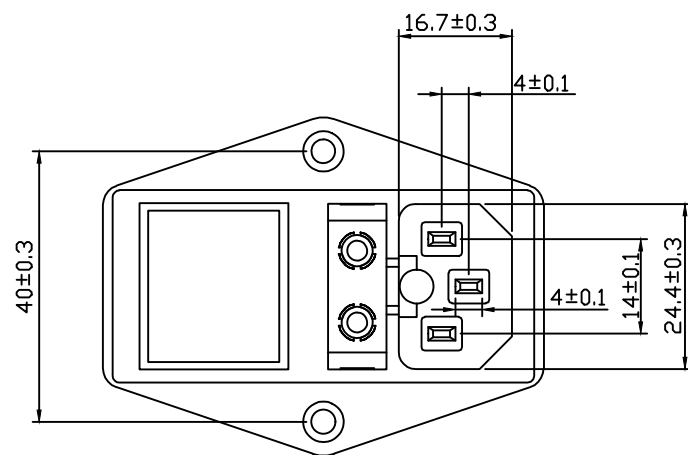

Electrical Characteristics:

Rating: 10A 250V AC

Insert and Extract Force: 1.36kgf~6.8kgf

Terminal Strength: $\geq 80N$

Operating Life: ≥ 5000 Cycles

Withstand Voltage:

Between all Terminals: 2000VAC(50-60Hz)1Min

Terminals to Base: 3750VAC(50-60Hz)1Min

Leakage Current: 1mA

Insulation Resistance: $\geq 100M\Omega$ 500V DC

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

AC Power Sockets*AC Plugs

THIRD ANGLE PROJECTION



RHTAYS-303-6