

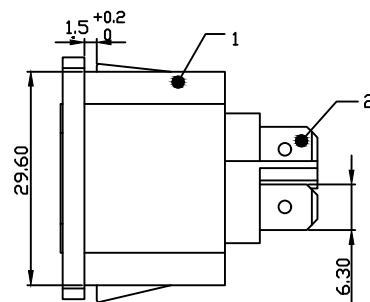
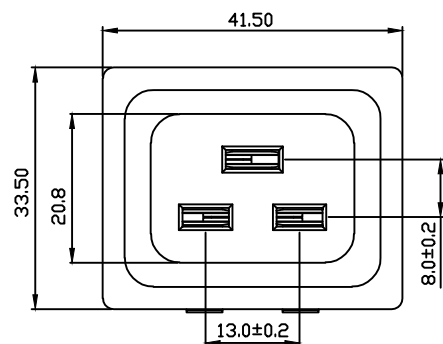

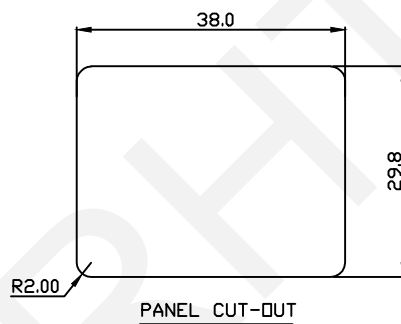


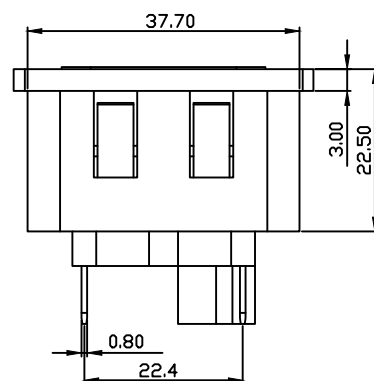

Represents cavity numbers 1-4



Serial No.	Name:	Material	Q'TY
1	Base	PA66,	1
2	6.3 Spring Clip Terminal	Brass t0.8	3

Rating: 16A 250V AC KC CE 3C TUV
 20A 250V AC UL cUL
 Insert and Extract Force: 1.36kgf~6.8kgf
 Terminal Strength: $\geq 80N$
 Operating Life: ≥ 5000 Cycles
 Withstand Voltage:
 Between all Terminals: 2500V AC(50-60Hz)1Min
 Terminals to Base: 3750V AC(50-60Hz)1Min
 Leakage Current: 1mA
 Insulation Resistance: $\geq 100M\Omega$ 500V DC

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

AC Power Sockets*AC Plugs

THIRD ANGLE PROJECTION

RHTAYS-19-2