
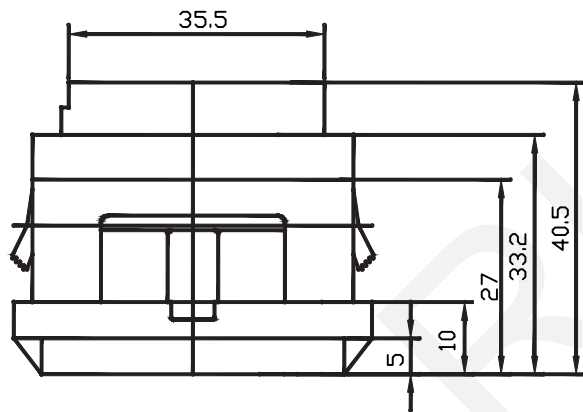
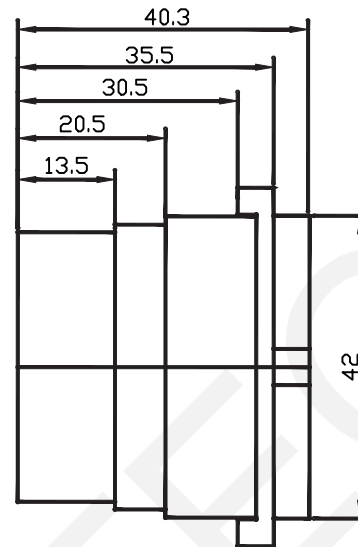


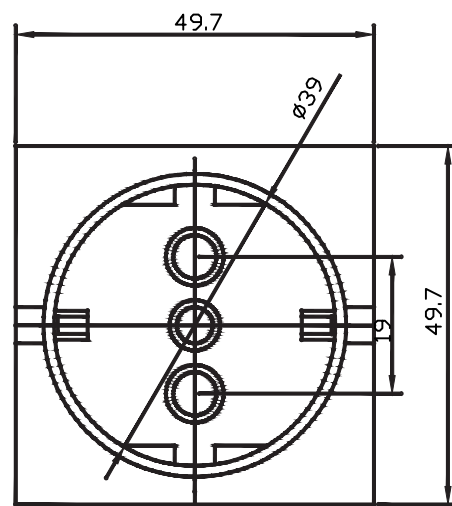

Material:  
 Material(External): Nylon PA66 PC  
 Rating Voltage: 250V 10A  
 Humidity: 93%+40  
 Insulation:  $\geq 100M\Omega$   
 Withstand Voltage: AC 500V(50Hz)/min

Electrical Characteristics:  
 Conduct Material: COPPER  
 Temperature Range:  $-40^{\circ}C+70^{\circ}C$   
 Contact Resistance:  $\leq 0.03\Omega$   
 Actuating Force: 5-40N  
 Lifespan: 10000times

#### ORDER INFORMATION

Product NO: RHTAYS-503

AC Socket

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm   | SHEET SIZE: A4 |           |           | SCALE:--- |
|------------|----------------|-----------|-----------|-----------|
| 0~3        | 3~18           | 18~50     | 50~120    |           |
| $\pm 0.12$ | $\pm 0.15$     | $\pm 0.3$ | $\pm 0.5$ |           |


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

AC Power Sockets\*AC Plugs

THIRD ANGLE PROJECTION



RHTAYS-503