
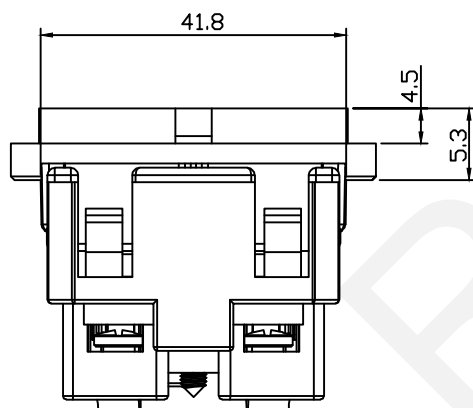
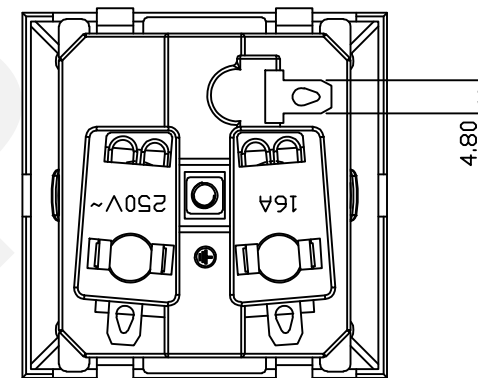
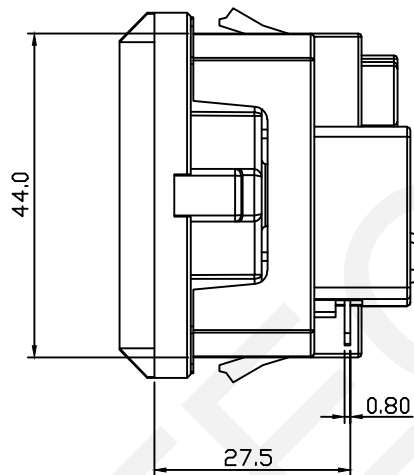


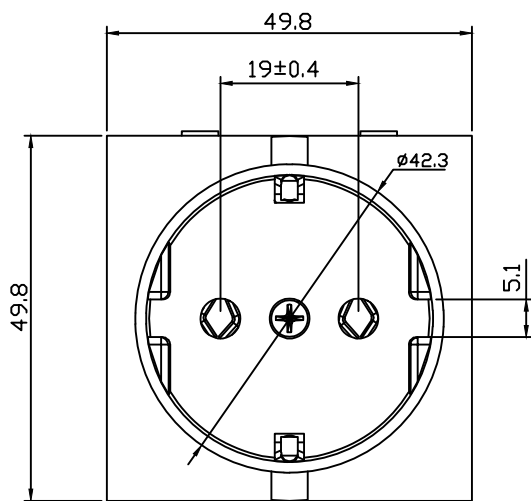

Electrical Characteristics:

Rating:16A 250V AC

Insert and Extract Force:1.36kgf~6.8kgf

Terminal Strength:≥80N

Operating Life:≥5000 Cycles

Withstand Voltage:

Between all Terminals:2500V AC(50-60Hz)1Min

Terminals to Base:3750V AC(50-60Hz)1Min

Leakage Current:1mA

Insulation Resistance:≥100MΩ 500V DC

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

AC Outlet



RHTAYS-504