

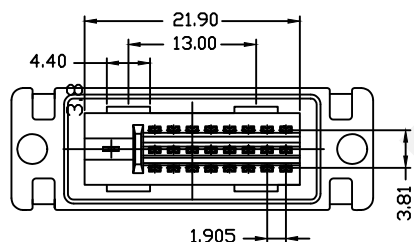

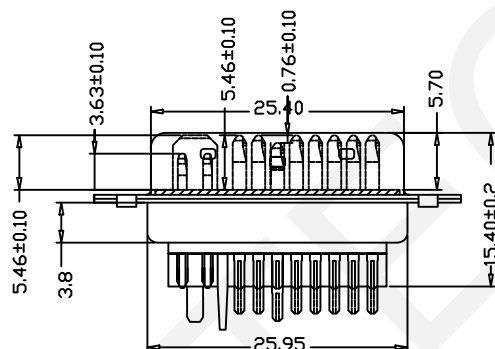
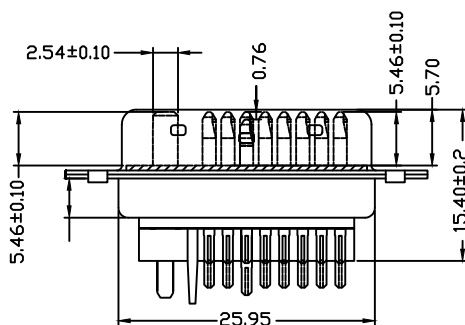
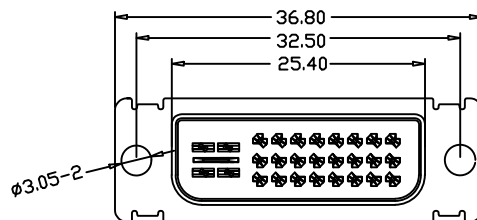


3.Drawing:

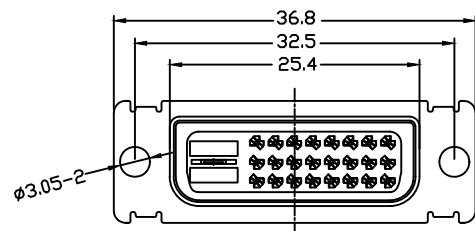

M25

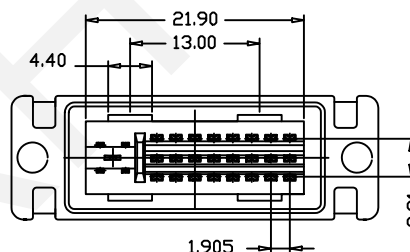

M29

1:Electrical Characteristics

Current Rating: 1.5amp.max

Dielectric with standing voltage: 500v ac R.M.S. for one min

Insulation resistance: 1000M Ohms min. at 500v dc

Contact resistance: 20M Ohms max

Operating temperature: 0~+85

2.Material:

Housing:PBT+258%

Terminal: Brass gold and tin palted

Back shield:Spcc tin plating plated

4:Ordering information

P/N:RHTAYVI-M25/M29-B/L/W

M25:24+1 digital signal

M29:24+5 digital& analog signal

Insulator color

W:White B:Black L:Blue

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN


Connector Male Plug Wire Solder Dual Link

THIRD ANGLE PROJECTION




RHTAYVI-M25/M29-B/L/W


3.Drawing:

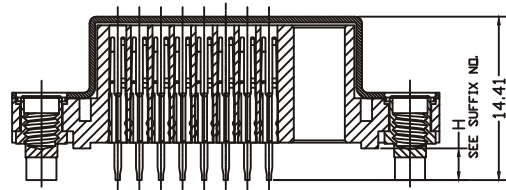



B-B SECTION



A-A SECTION

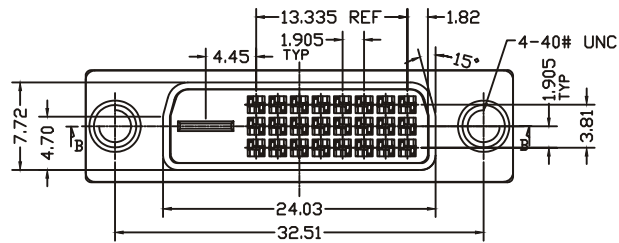

P.C.B LAYOUT

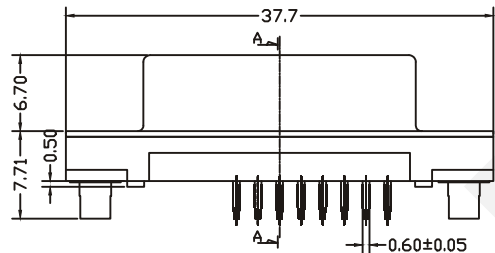

1:Electrical Characteristics

Current Rating: 1.5amp.max

Dielectric with standing voltage:

500v ac R.M.S. for one min

Insulation resistance: 1000M Ohms min. at 500v dc

Contact resistance: 20M Ohms max

Operating temperature: 0~+85

2.Material:

Housing:PBT+258%

Terminal: Brass gold and tin palted

Back shield:Spcc tin plating plated

4:Ordering information

P/N:RHTAYVI-F1-25/29-B/L/W

25:24+1 digital signal

29:24+5 digital& analog signal

Insulator color

W:White B:Black L:Blue




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5



CHK'D BY FENG
APPR BY ZHAN

Connector Female Socket
Suit To Hood type Dual Link



RHTAYVI-M25/M29-B/L/W

3.Drawing:

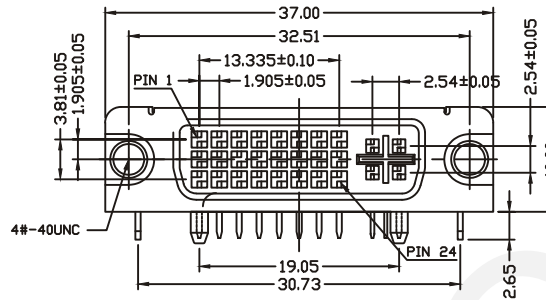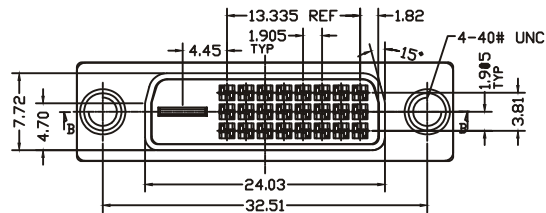

1:Electrical Characteristics

Current Rating: 1.5amp,max

Dielectric with standing voltage:

500v ac R.M.S. for one min

Insulation resistance: 1000M Ohms min. at 500v dc

Contact resistance: 20M Ohms max

Operating temperature: 0~+85

2.Material:

Housing:PBT+258%

Terminal: Brass gold and tin palted

Back shield:Spcc tin plating plated

4:Ordering information

P/N:RHTAYVI-F2-25/29-S/R-B/L/W

25:24+1 digital signal





29:24+5 digital& analog signal

S Straigh pcb dip 180

R Right angle pcb dip 90

Insulator color

W:White B:Black L:Blue

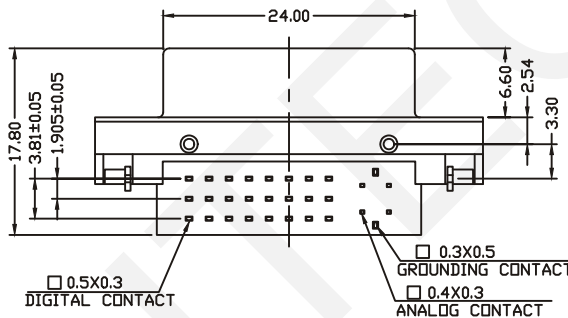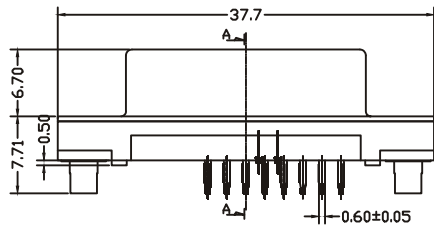

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Connector Female Socket PCB Dip Type Dual Link

THIRD ANGLE PROJECTION



RHTAYVI-F2-25/29-S/R-B/L/W