
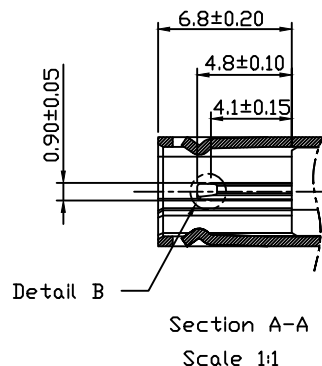
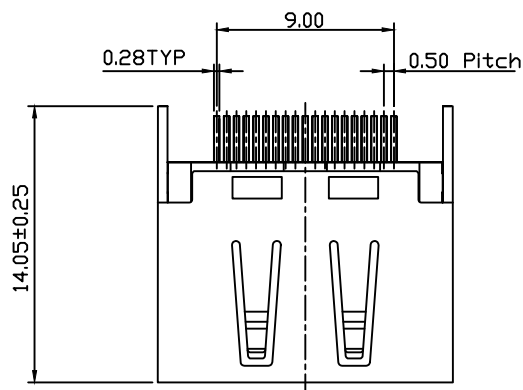
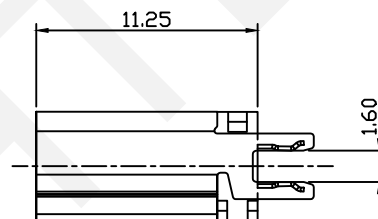


Material:
Housing: LCP+30%GF UL94-V0, Color black
Shell: SPCC, Plating gold overall
Terminal: C2680, Gold plated within connect area,
Tin plated within solder area.

Electrical Characteristics:
Current rating: 0.5A
Voltage rating: 40V AC MAX
Contact Resistance: 30mΩ Max
Insulator Resistance: 100MΩ DC Min (Unmated),
10MΩ DC Min (Mated)
Dielectric strength: 500V AC Min (Unmated);
300V AC Min (Mated)
Temperature range: -40°C ~ +85°C
Insertion force: 44.1N MAX
Withdrawal Force: 9.8~39.2N
Durability: 10000 Cycles

Order Information:
RHTAY010-G

Plating:
G=Gold N=Nickle

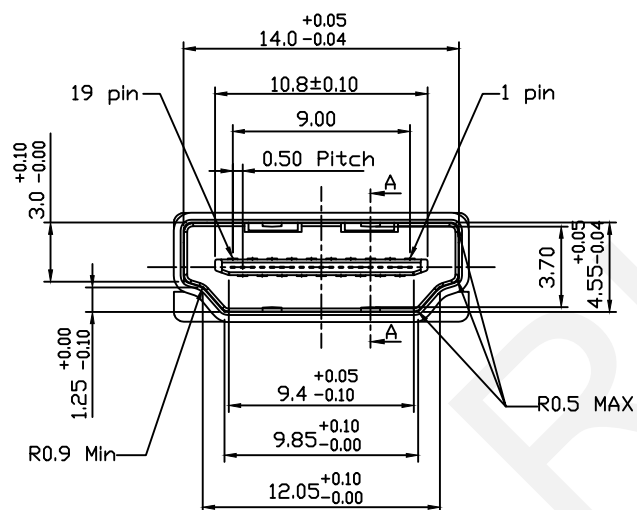


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

HDMI A Female Splint type+ Semi Sheath
THIRD ANGLE PROJECTION
RHTAY-010-G

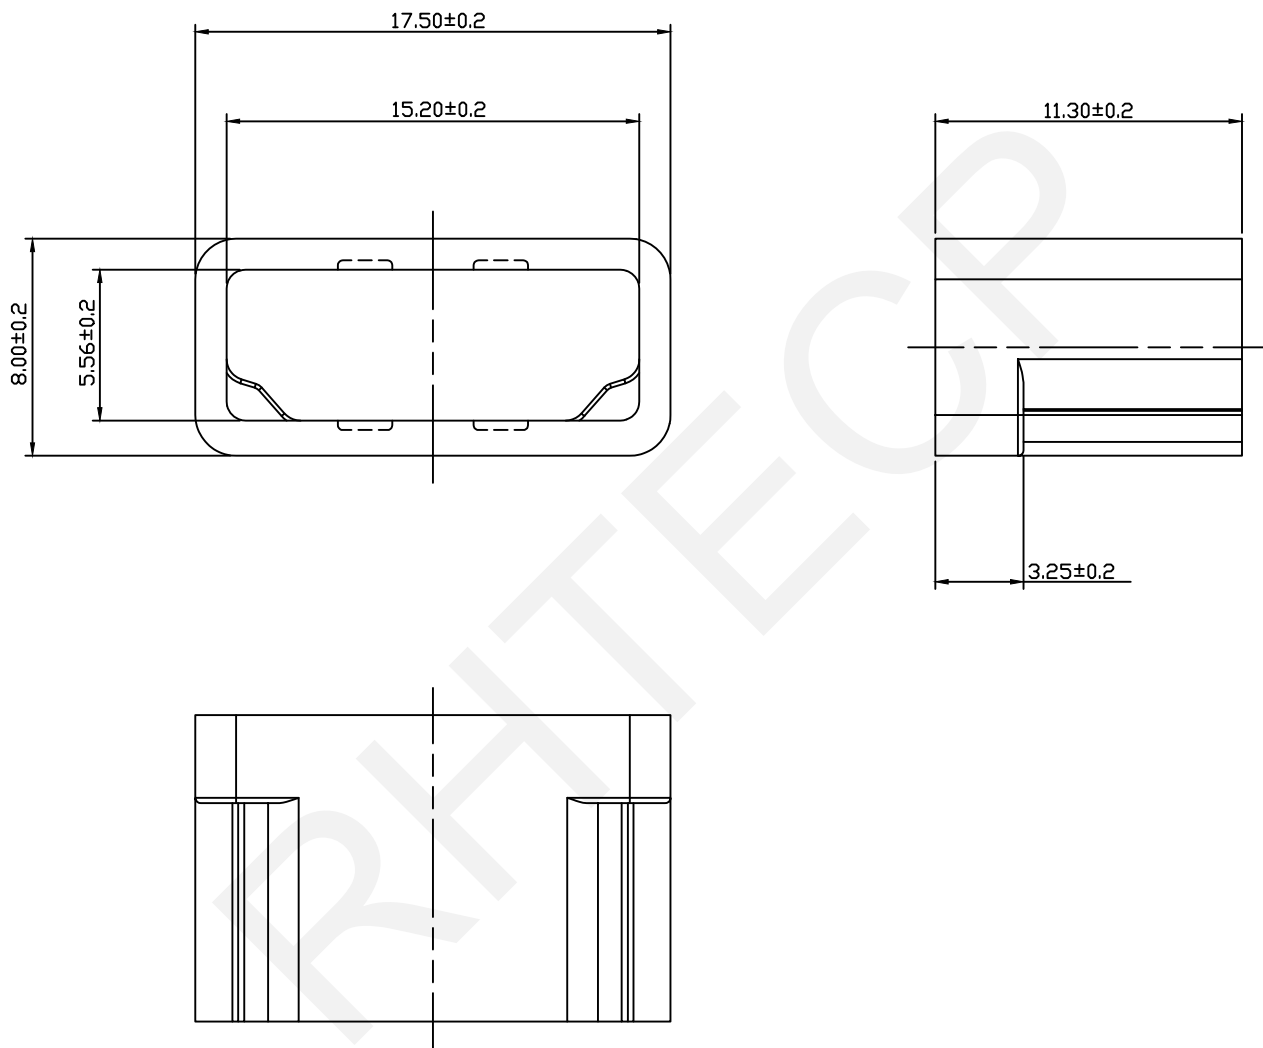

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Semi sheath,Material:ABS,Color black

THIRD ANGLE PROJECTION



RHTAY-010-G