
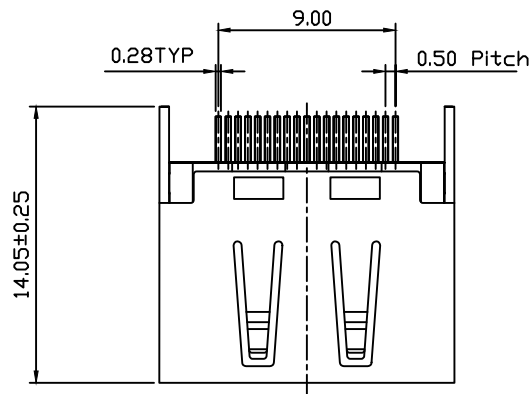


Section A-A
Scale 1:1



Detail B
Scale 2:1

Material:

Housing: LCP+30%GF UL94-V0, Color black

Shell: SPCC, Plating gold overall

Terminal: C2680, Gold plated within connect area,
Tin plated within solder area.

Electrical Characteristics.

Current rating: 0.5A

Voltage rating: 40V AC MAX

Contact Resistance: 30mΩ Max

Insulator Resistance: 100MΩ DC Min (Unmated),
10MΩ DC Min (Mated)

Dielectric strength: 500V AC Min (Unmated);
300V AC Min (Mated)

Temperature range: -40°C+ 85°C

Insertion force: 44.1N MAX

Withdrawal Force: 9.8~39.2N



Durability: 10000 Cycles

Order Information:

RHTAY011-G

Plating:

G=Gold N=Nickle

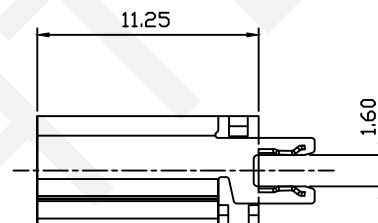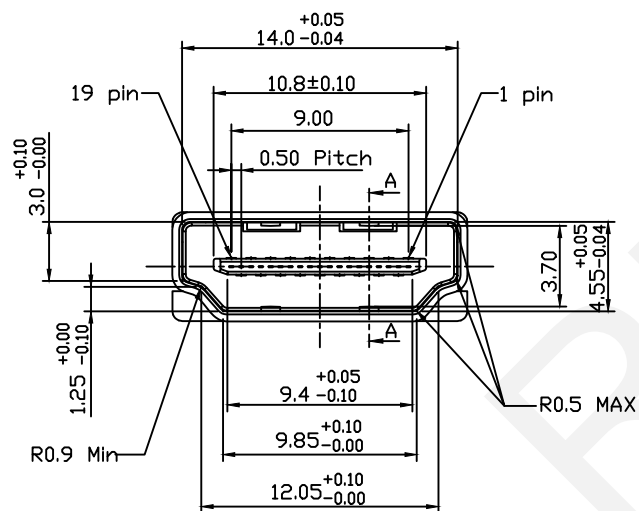

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

HDMI A Female Splint type+The Sheath

THIRD ANGLE PROJECTION



RHTAY-010-G



NINGBO RHT ELECTRONIC CO.,LTD

