

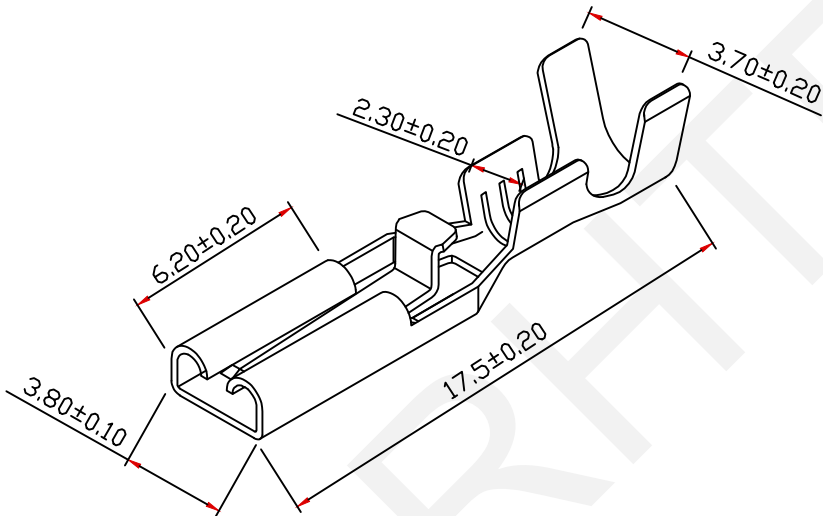




| | | | | | | | | | | | |
|---|---|---|---|----------|----------------|-----------|-------------|---|---|--------------------|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | |
| A | | | | | | | | | | A | |
| B | | | | | | | | | | B | |
| C | | | | | | | | | | C | |
| D | | | | | | | | | | D | |
| E | | | | | | | | | | E | |
| F | | | | | | | | | | F | |
| G |  NINGBO RHT ELECTRONIC CO.,LTD | | | UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN | 110 Type Lock Female Terminal for Cable | | | G |
| | | | | 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG | THIRD ANGLE PROJECTION  | RHTHY1LS03-1100800 | |
| | | | | ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN | | | |
| | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |



- Note:
- 1. Appearance:Terminal cannot be corrected,scratched or oxidized
 - 2. Material:
Brass C2680,T=0.25mm, Tin plating
 - 3.Q'TY:1000PCS/REEL
 - 4.Connectoin Table: W2.8xT0.8mm
 - 5.Wire Range:18~22AWG