


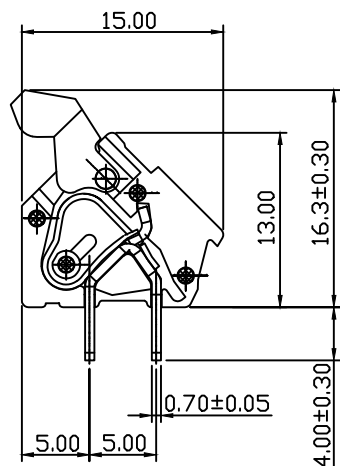
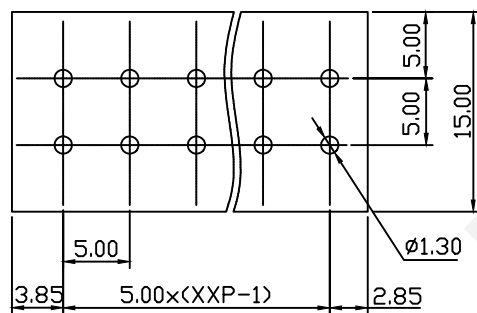


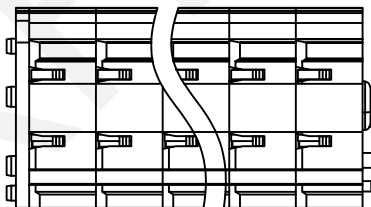

SECTION A-A

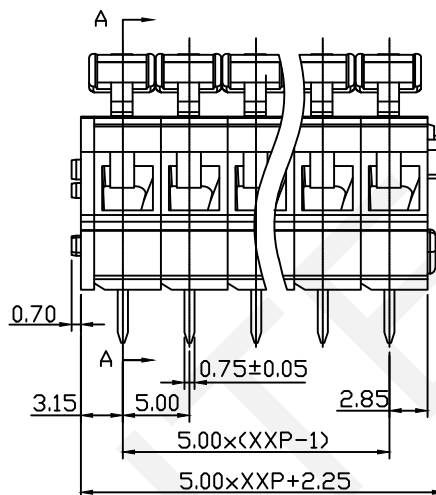

Recommended PCB Layout

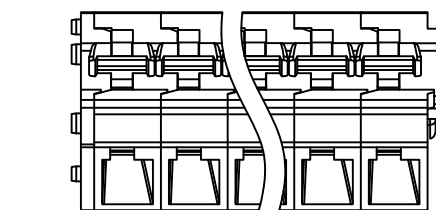

Material:
Housing:PA66,UL94V-0
Contactor:Brass, Tin Plated
Wire Range:Stainless Steel
Strip Length:5~6mm
Temp Range:-40°C~+105°C
Soldering:250°C For 5s

Order Information
RHTBY43V-5.00-XXP-X

Terminal Block
Pitch:5.00mm
No. of (1~XX) Pins
Color:1=Gray 2=Blue
3=Black 4=Green 5=Orange
6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	10A	15A
Withstand Voltage	AC2000V/1min	---
Wire Range	28~14 AWG	2.5mm ²

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

5.00 Spring Terminal Blocks

THIRD ANGLE PROJECTION

RHTBY43V-5.00-XXP-X