

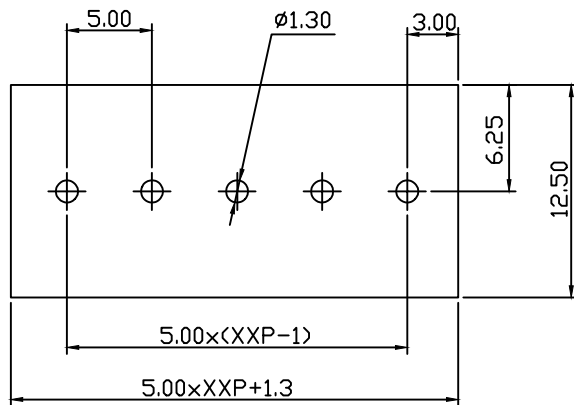
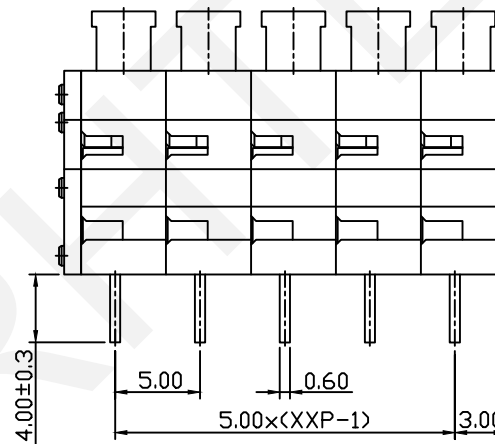


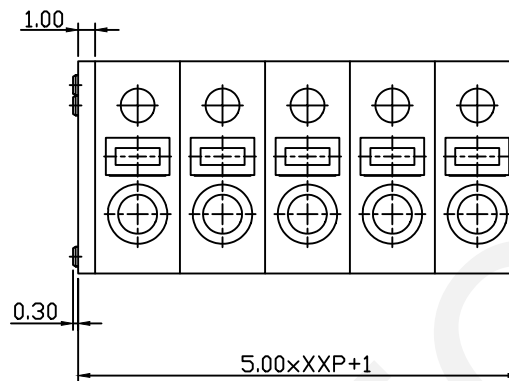

Recommended PCB Layout

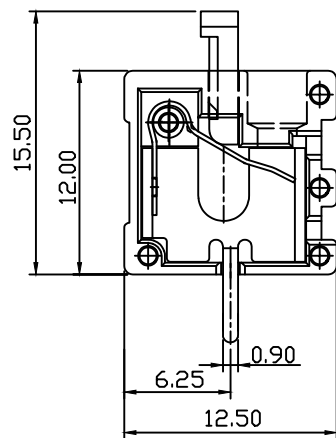

Material:

Housing:PA66,UL94V-0

Contactors:Brass, Tin Plated

Wire Range:Stainless Steel

Strip Length:11mm

Temp Range:-40°C~+105°C

Soldering:250°C±5°C For 5s

Order Information

RHTBY11V-5.00-XXP-X

Terminal Block

Pitch:5.00mm

No. of (1~XX) Pins

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	10A	15A
Withstand Voltage	AC2000V/1min	---
Wire Range	26~14 AWG	1.50 mm ²

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

5.00 Spring Terminal Blocks

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBY11V-5.00-XXP-X