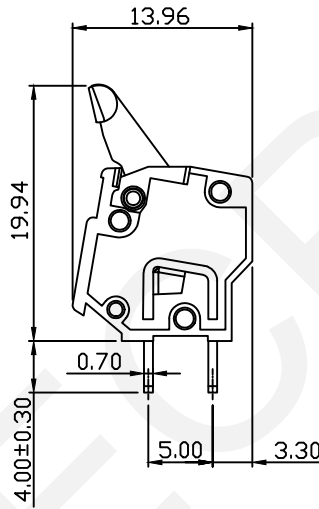
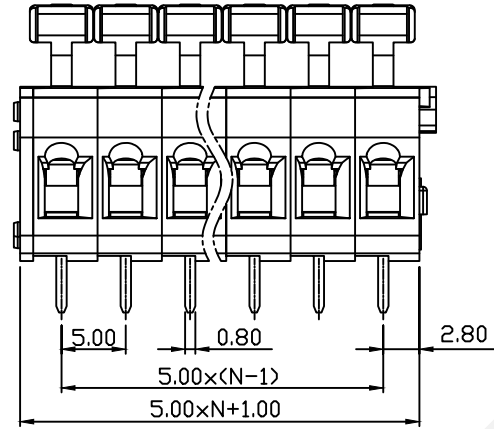
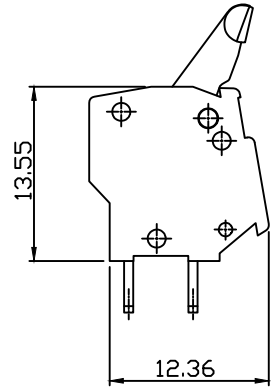



PCB Layout

Material:
Housing:PA66,UL94V-0
Contactor:Brass, Tin Plated
Shrapnel:Stainless Steel

Electrical:
Rated Voltage:300V
Rated Current:15A
Wire Range:28~12 AWG 2.5mm²
Contact Resistance:20mΩ
Insulation Resistance:500MΩ /DC500V
Withstand Voltage:AC2000 V/1 min

Mechanical
Temp Range:-40°C~+105°C
Soldering:250°C±5°C For 5s
Strip Length:5~6 mm

Order Information
RHTBY42R-5.00-XXP-1-xx




RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Spring Clamp Terminal Block 5.00mm

THIRD ANGLE PROJECTION



RHTBY42R-5.00-XXP-1