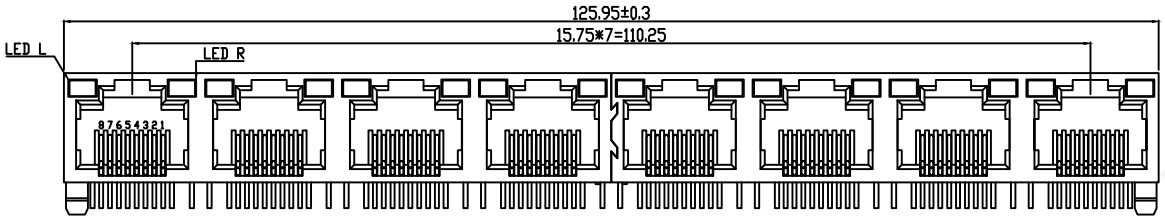



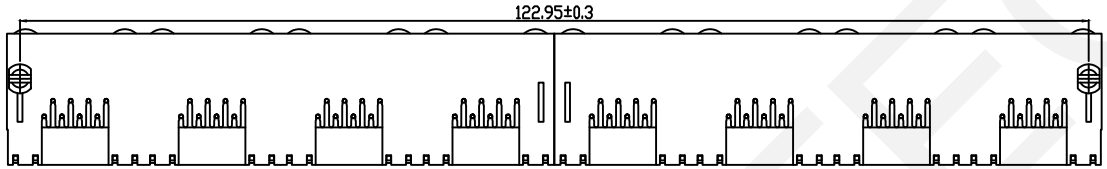

LED L YELLOW LED R GREEN

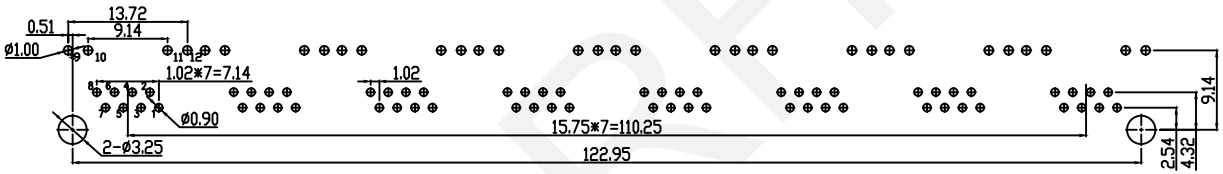

NOTES:

ELECTRICAL:

1.VOLTAGE RATING:125V AC.

2.CURRENT RATING: 1.5A.

3.CONTACT RESISTANCE:30MΩ MAX.

4.INSULATION RESISTANCE:500MΩ MI@500VDC

5.DIELECTRIC STRENGTH:1000V AC50Hz 60Hz,1MIN.

MECHANICAL:

1.INSERT MATERIAL: UL94V-0.

2.CONTACT MATERTAL:DIAMETER 0.46mm C51000(QSn4-0.3)PHOSPHOR BRONZE GOLD PLATING ONER NICKEL.

3.MATING/UNMATING FORCE:2.2KG.F MAX.

4.RETENTION STRENGTH:5.0KG,F MIN BETWEEN JACK AND PLUG.

5.OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

1.STORAGE:-40°C+85°C RELATIVE HUMIDITY<70%.

2.OPERATION:-40°C~+85°C.

RHTECP

RHTECP NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	DIP SWITCH 2.54MM PITCH TAPE SEALED 4POS ROHS
	0~3	3~18	18~50	50~120	CHK'D BY FENG
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
	THIRD ANGLE PROJECTION				RHTLY15-8P8C1X8