

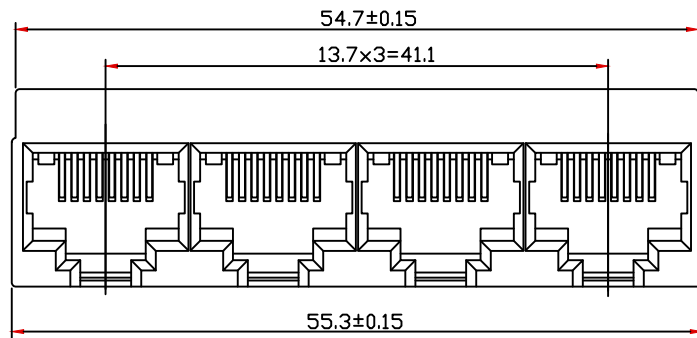


Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating: Gold Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

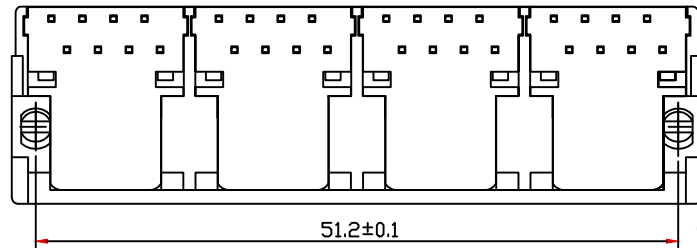

Order Information
RHTLY57-8P8C-1-1x4-XX

Contacts: 8P8C
Color Code: 1-Black
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

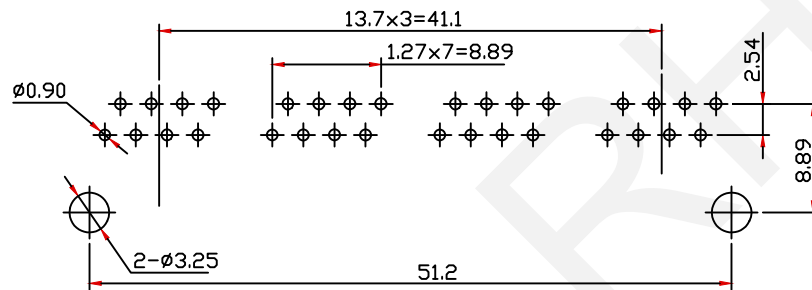





PCB Layout

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

1x4 Modular Jacks RJ45-8P8C Jack,without SHELL,Black	
THIRD ANGLE PROJECTION 	RHTLY57-8P8C-1-1x4-01

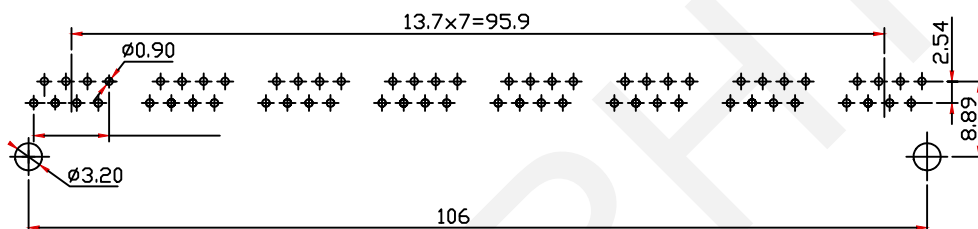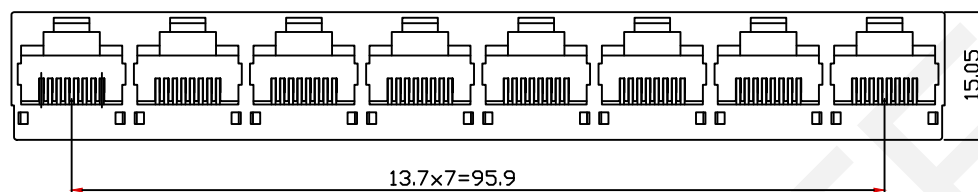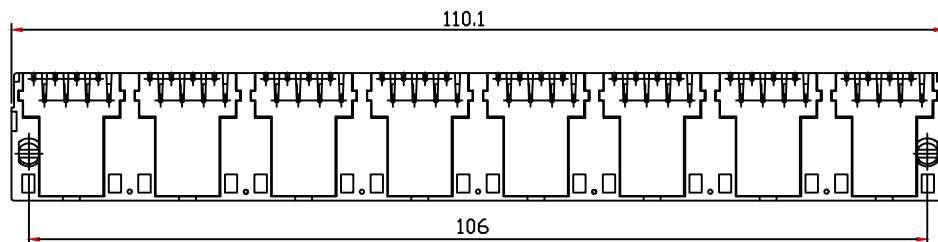

PCB Layout

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\phi 0.46\text{mm}$
Plating:Gold Plating
Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information
RHTLY57-8P8C-1-1x8-XX

Contacts:8P8C
Color Code: 1-Black
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

RHTECP[®] NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

1x8 Modular Jacks RJ45-8P8C
Jack,without SHELL,Black

THIRD ANGLE PROJECTION

RHTLY57-8P8C-1-1x8-01