
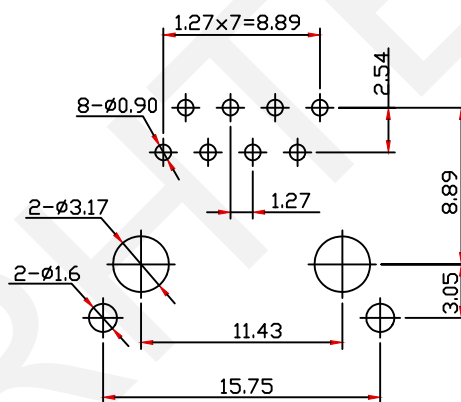
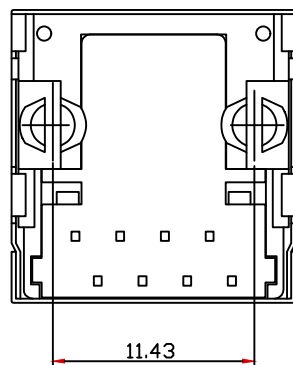
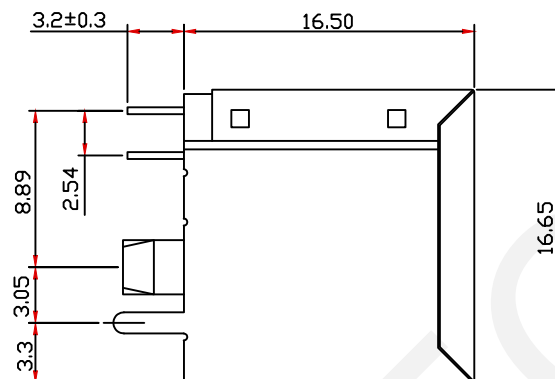


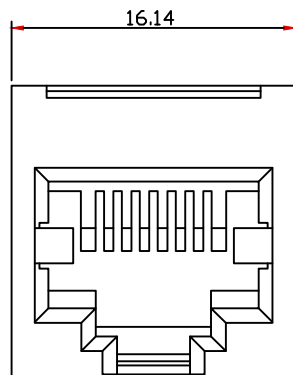

PCB Layout

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze Ø0.46mm

Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40℃~+70℃

Order Information

RHTLY58-8P8C-W-1x1-1-XX

Contacts: 8P8C

Shield: W-with Shield

Shield Peg Code:

1-Front 3.05mm

2-Front 3.68mm

4-Back 3.05mm

Plating Code:

01-Fu' Gold Plating

02-3u' Gold Plating

03-6u' Gold Plating

04-15u' Gold Plating

05-30u' Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular Jacks,RJ45-8P8C
Jack with SHELL,Front 3.05mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLY58-8P8C-W-1x1-1-XX

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4





5

6

7

8

9

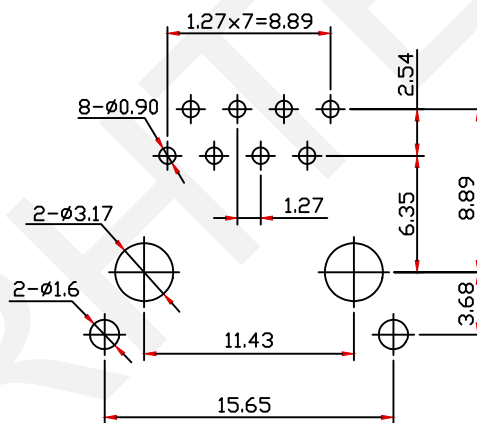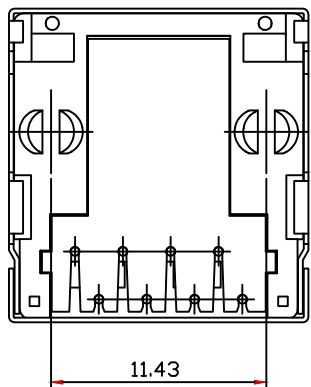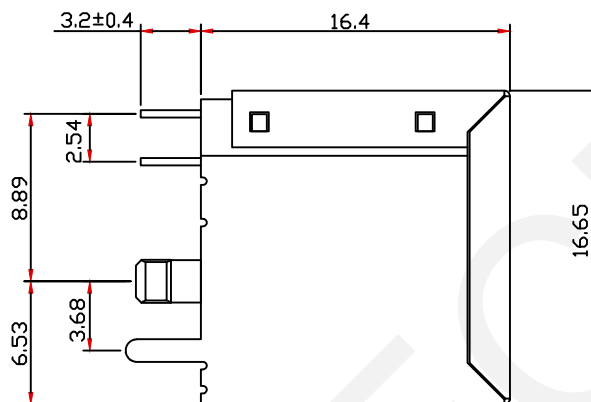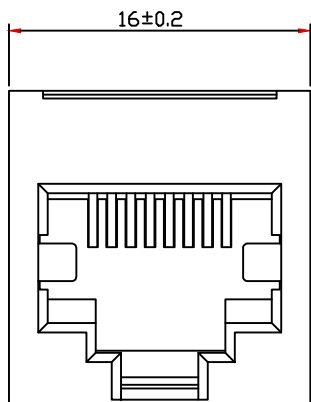

PCB Layout

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze Ø0.46mm
Plating: Gold Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40℃~+70℃

Order Information

RHTLY58-8P8C-W-1x1-2-XX

Contacts: 8P8C
Shield: W-with Shield
Shield Peg Code:

1-Front 3.05mm
2-Front 3.68mm
4-Back 3.05mm

Plating Code:

01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular Jacks,RJ45-8P8C
Jack with SHELL,Front 3.68mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLY58-8P8C-W-1x1-2-XX


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4





5

6

7

8

9

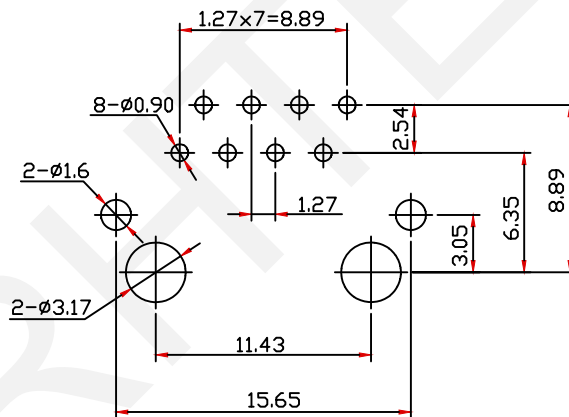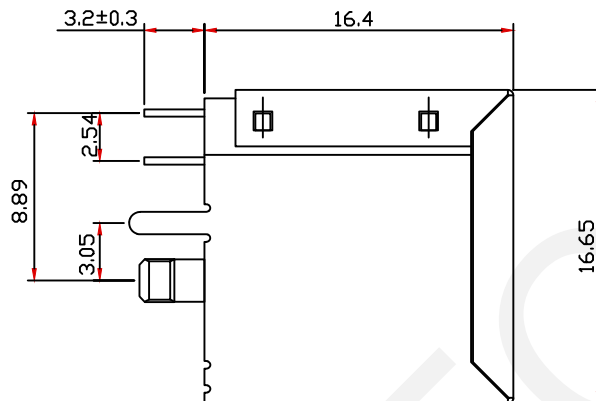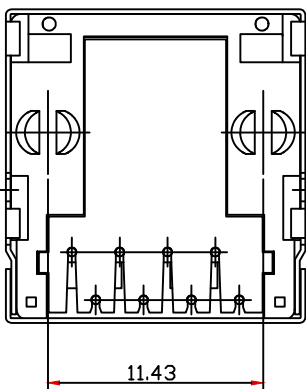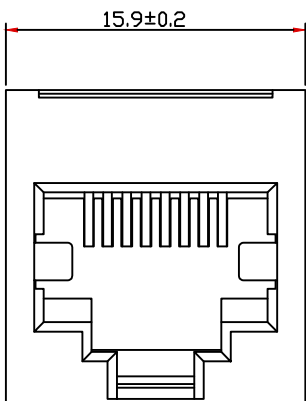

PCB Layout

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze Ø0.46mm
Plating: Gold Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40℃~+70℃

Order Information

RHTLY58-8P8C-W-1x1-4-XX

Contacts: 8P8C
Shield: W-with Shield
Shield Peg Code:

1-Front 3.05mm
2-Front 3.68mm
4-Back 3.05mm

Plating Code:

01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular Jacks,RJ45-8P8C
Jack with SHELL,Front 3.05mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLY58-8P8C-W-1x1-4-XX


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9