
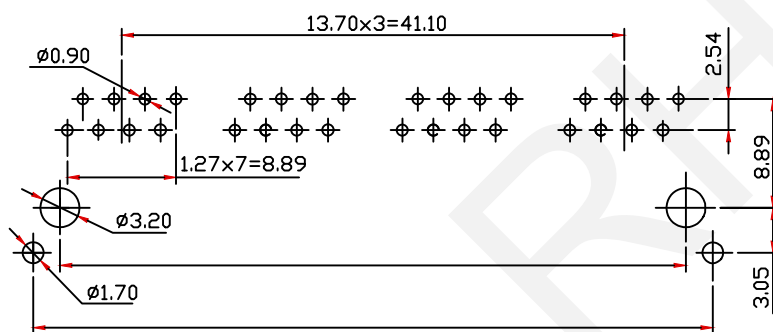
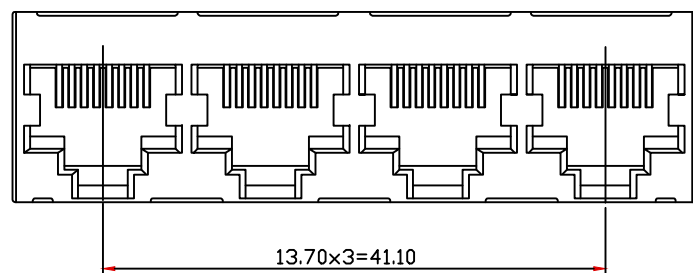
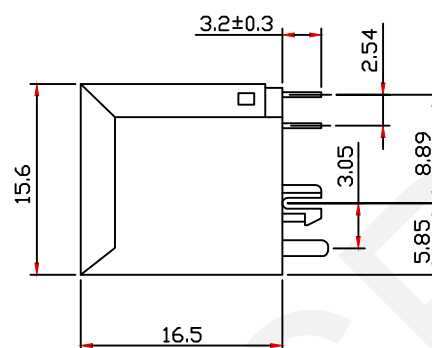


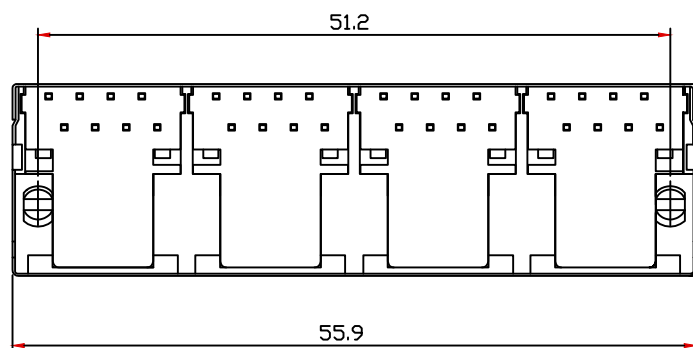

PCB Layout

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating
Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ $+70^{\circ}\text{C}$

Order Information

RHTLY58-8P8C-W-1x4-1-XX

Contacts: 8P8C
Shield: W-with Shield
Shield Peg Code:
1-Front 3.05mm
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1x4 RJ45-8P8C Modular
jack with SHELL,Front 3.05mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTLY58-8P8C-W-1x4-1-XX

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN