
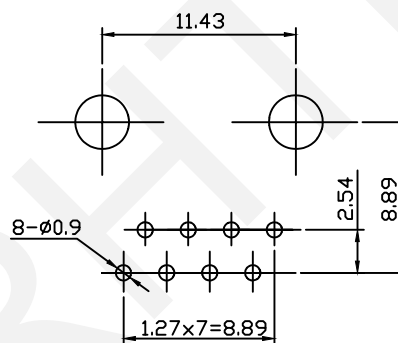
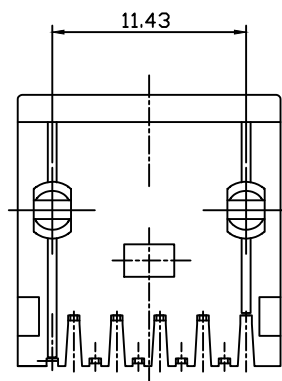
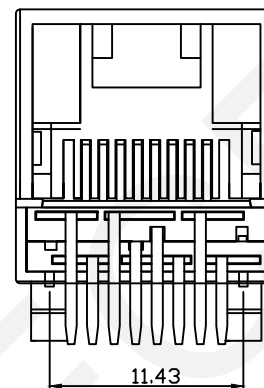
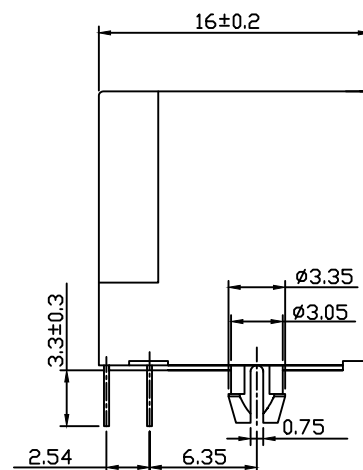


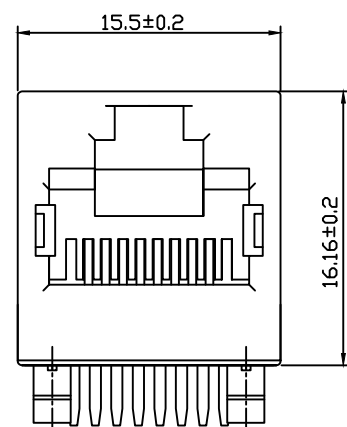

PCB Layout

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze
Plating:Gold Plating
Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30mΩ Max.
Insulation Resistance: 500MΩ Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40℃~+70℃

Order Information
RHTLY58RA-8P8C-XX

Contacts:8P8C
Plating Code:
01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

CAT6 RJ45-8P8C
Modular jacks,without SHELL

THIRD ANGLE PROJECTION



RHTLY58RA-8P8C-01