

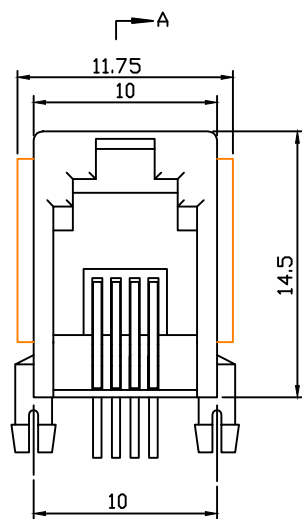



without Panel

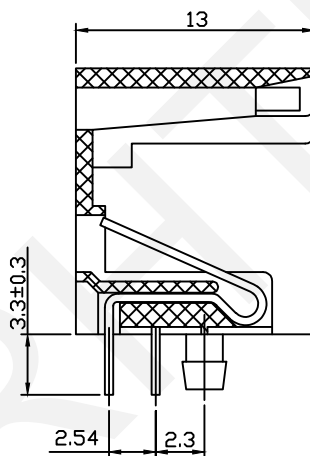

with Panel



SECTION A-A

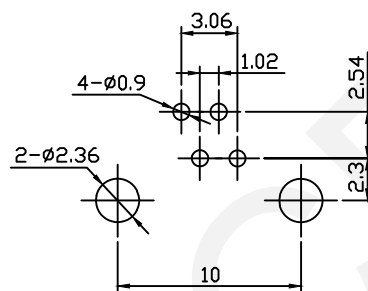

PCB Layout

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze $\phi 0.46\text{mm}$

Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A

Contact Resistance: $30\text{m}\Omega$ Max.

Insulation Resistance: $500\text{M}\Omega$ Min.

Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: $-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$

Order Information

RHTLY23-4P4C-W-1-XX

Contacts: 4P4C

Panel: W-with Panel

W/O-without Panel

Color Code:

1-Black 2-Gray

Plating Code:

01-Fu' Gold Plating

02-3u' Gold Plating

03-6u' Gold Plating

04-15u' Gold Plating

05-30u' Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

RJ11-4P4C Modular jacks

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTLY23-4P4C-X-X-XX