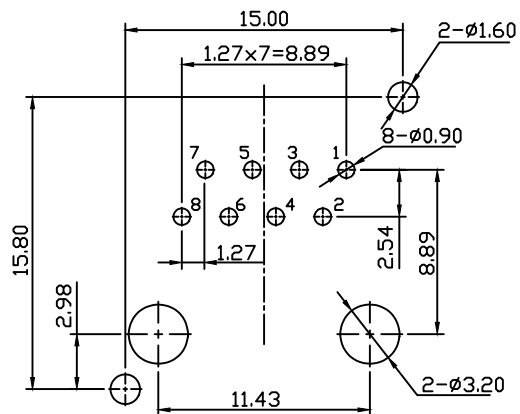
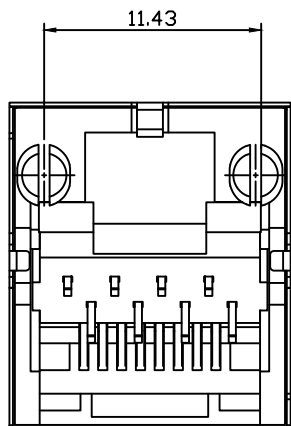


Material
Housing: PBT UL94V-0, White
Contact: C5191 (QSn6.5-0.1) Phosphor Bronze
T=0.35mm, Gold Plating On Contact Area
Tails Plating Tin Over Nickel
Shield: H65y Brass Nickel Plated, T=0.20mm

Electrical:
Current Rating: 1.5A
Voltage Rating: 125VAC
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ Min @500VDC
Withstanding Voltage: 1000VAC 50Hz or 60Hz 1min
Mating/Unmating Force: 2.2KG.F Max
Retention Strength: 3.0KG.F Min Between Jack And Plug
Operating Life: 600 cycles min
Storage Temp: -40°C~+85°C Relative Humidity: <70%
Operating Temp: -40°C~+85°C

Order Information




RHTLY62-8P8C-W-01

Point NO. 8P8C Point.

Panel: W-With Shield

Plating Code

01=Fu' Gold Plating 02=3u' Gold Plating
03=6u' Gold Plating 04=15u' Gold Plating
05=30u' Gold Plating

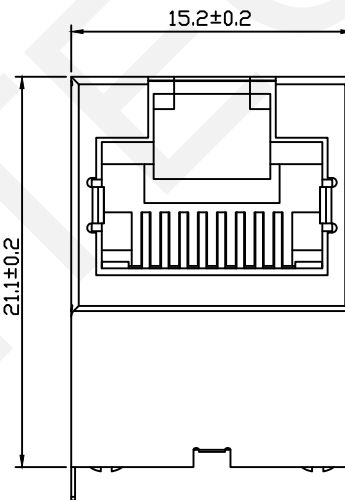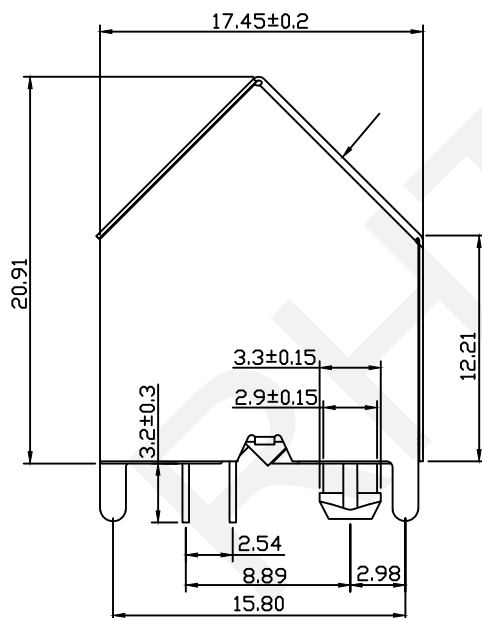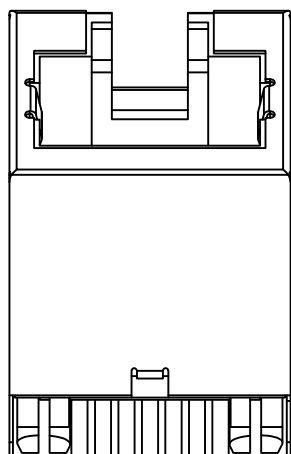

A VIEW

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

RJ45-8P8C jack 45 DEG

THIRD ANGLE PROJECTION



RHTLY62-8P8C-W-XX