


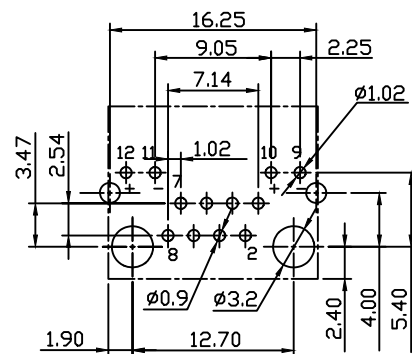


With Panel

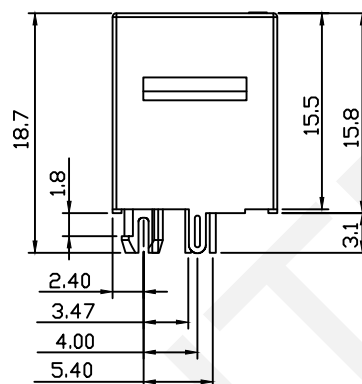

Without Panel



## PCB Layout

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating:UL94V-0

Contacts: Phosphor Bronze  $\varnothing 0.46\text{mm}$

Plating:Gold Plating

Electrical:

Voltage Rating:125VAC

Current Rating:1.5A

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500M $\Omega$  Min.


Dielectric Strength:1000VAC Rms 50Hz,1 Min.

Durability: 600 cycles Min.

□ Operation Temperature: -40℃~+70℃

## Order Information

RHTLY63-8P8C-1-G/Y-XX



Plating Code:


01-Fu" Gold Plating

02-3u' Gold Plating

03-6u' Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

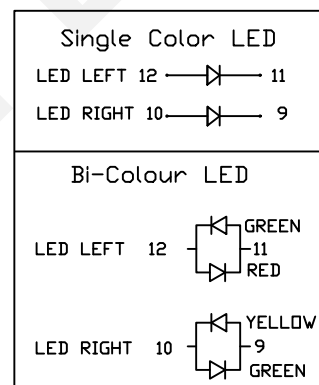

|          |                |           |             |                                                 |                                                                                                                                                          |
|----------|----------------|-----------|-------------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN | RJ45-8P8C Low Profile<br>Modular jacks,with LED |                                                                                                                                                          |
| 0~3      | 3~18           | 18~50     | 50~120      | CHK'D BY FENG                                   | <div>THIRD ANGLE PROJECTION</div>  <div>RHTLY63-8P8C-X-X/X-XX</div> |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        | APPR BY ZHAN                                    |                                                                                                                                                          |