


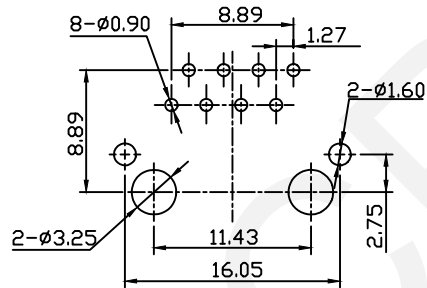




	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	RJ45-8P8C LoW Profile Modular Jacks THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9

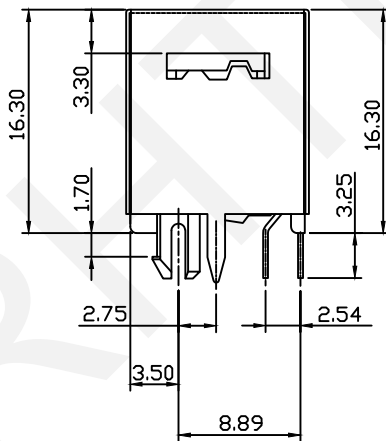

PCB Layout

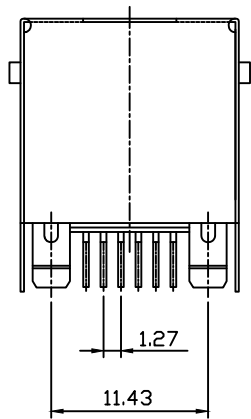

Material:

Housing:PBT+Glass Filled Polyester

Flammability Rating:UL94V-0

Contacts:Phosphor Bronze

Plating:Gold Plating

Shield:Brass, Tin Plating

Electrical:

Voltage Rating:125VAC

Current Rating:1.5A

Contact Resistance:30mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Strength:1000VAC Rms 50Hz,1 Min.

Durability:600 cycles Min.

Operation Temperature:-40℃~+70℃

Order Information

RHTLY66-8P8C-XX

Contacts:8P8C

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating