

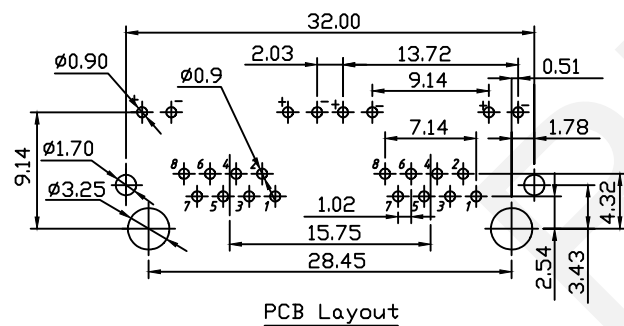
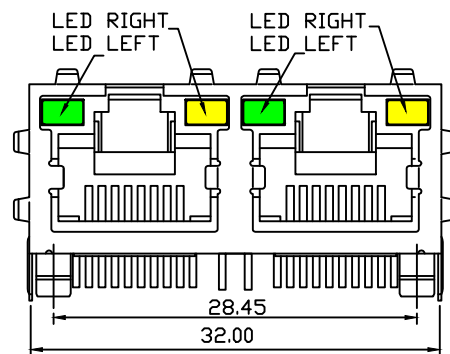
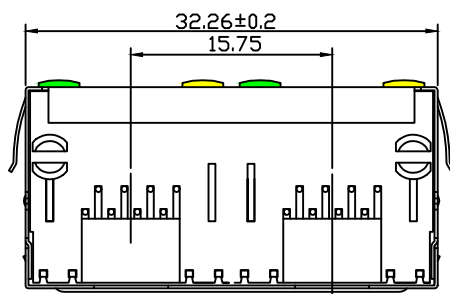


with Shield



TOP EMI Shield

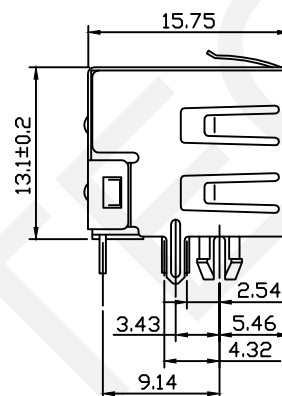

with EMI Shield

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ $+70^{\circ}\text{C}$

Order Information
RHTLY08-8P8C-1x2-X-G/Y-0-XX

Contacts: 8P8C
Shield Code:
1-with Shield
2-with EMI Shield
3-TOP EMI Shield
LED Code: LEFT/RIGHT
G/Y-Green/Yellow
Y/G-Yellow/Green
Plating Code:
01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating


RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Modular Jacks with LED,RJ45-8P8C with SHELL

THIRD ANGLE PROJECTION



RHTLY08-8P8C-1x2-X-X/X-0-XX