





with Shield

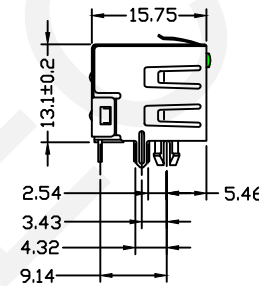

TOP EMI Shield

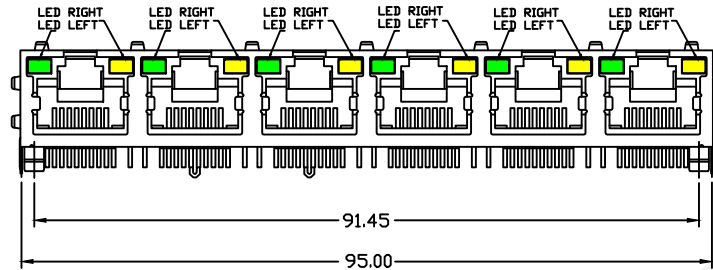

with EMI Shield

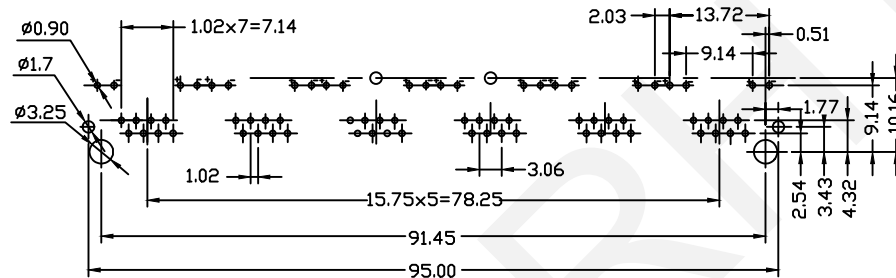

PCB Layout

Material:

Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating

Electrical:

Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Order Information

RHTLY08-8P8C-1x6-X-G/Y-2-XX

Contacts: 8P8C

Shield Code:

1-with Shield

2-with EMI Shield

3-TOP EMI Shield

LED Lode: LEFT/RIGHT

G/Y=Green/Yellow, Y/G=Yellow/Green

G/R=Green/Red, R/G=Red/Green

G/G=Green/Green, Y/Y=Yellow/Yellow

R/R=Red/Red

Plating Code: 01-Fu" Gold Plating

02-3u" Gold Plating, 03-6u" Gold Plating

04-15u" Gold Plating, 05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Modular jacks with LED,
RJ45-8P8C 1x6 with SHELL

THIRD ANGLE PROJECTION



RHTLY08-8P8C-1x6-X-X-2-XX