


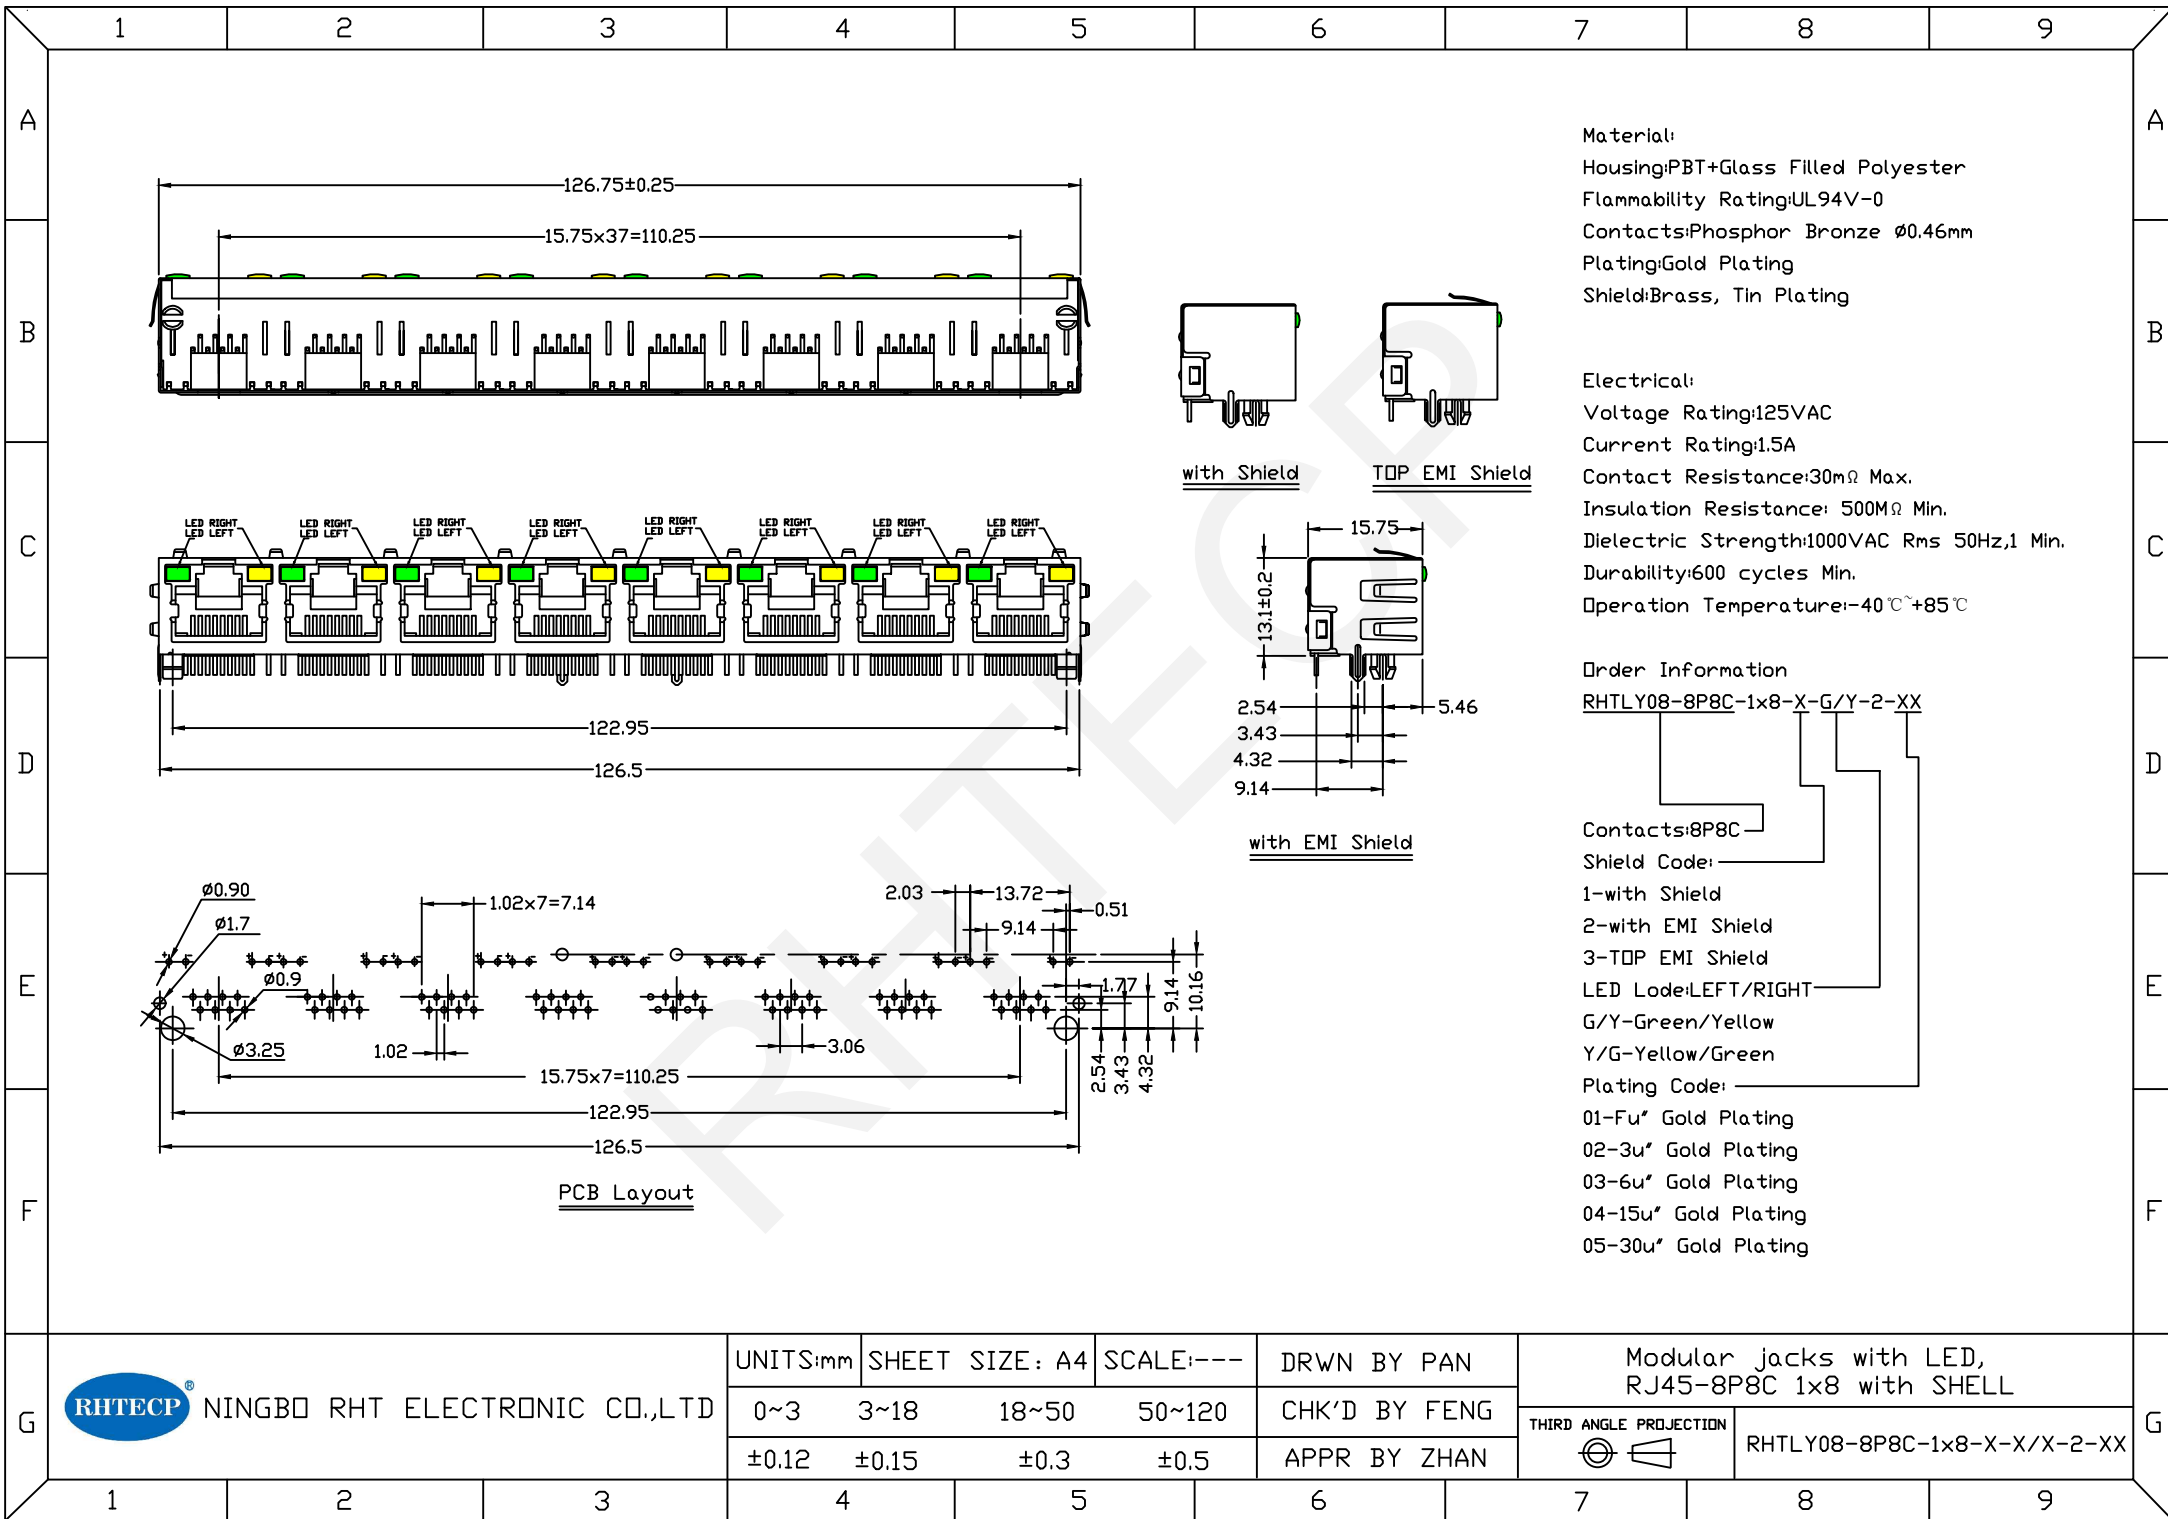

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating:Gold Plating
Shield:Brass, Tin Plating

Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ +85 $^{\circ}\text{C}$

Order Information
RHTLY08-8P8C-1x8-X-G/Y-2-XX

Contacts:8P8C
Shield Code:
1-with Shield
2-with EMI Shield
3-TOP EMI Shield
LED Lode:LEFT/RIGHT
G/Y-Green/Yellow
Y/G-Yellow/Green
Plating Code:
01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating