




with EMI Shield

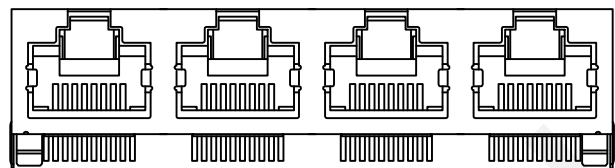

with Shield

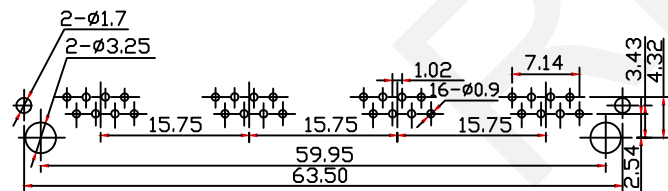

PCB Layout



Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating:Gold Plating

Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information

RHTLYA40-8P8C-1x4-X-XX

Contacts:8P8C

Shield Code:

W-with Shield

E-with EMI Shield

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

RJ45-8P8C 1x4 Modular Jacks with Shield

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLYA40-8P8C-1x4-W-XX


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9