

Electrical Specification:

Contact Resistance: $\leq 0.03\Omega$

Insulation Resistance: $\geq 100m\Omega$

Withstand Voltage: 500V AC (50Hz)/minute

Rated Load: 50V DC, 1A

Insertion And Extraction Force: 4-40N


Temperature Range: -30°C to $+80^{\circ}\text{C}$

Order Information:

RHTAYLR-S18-01

XLR Jack series

01 02 03 Use this chart to

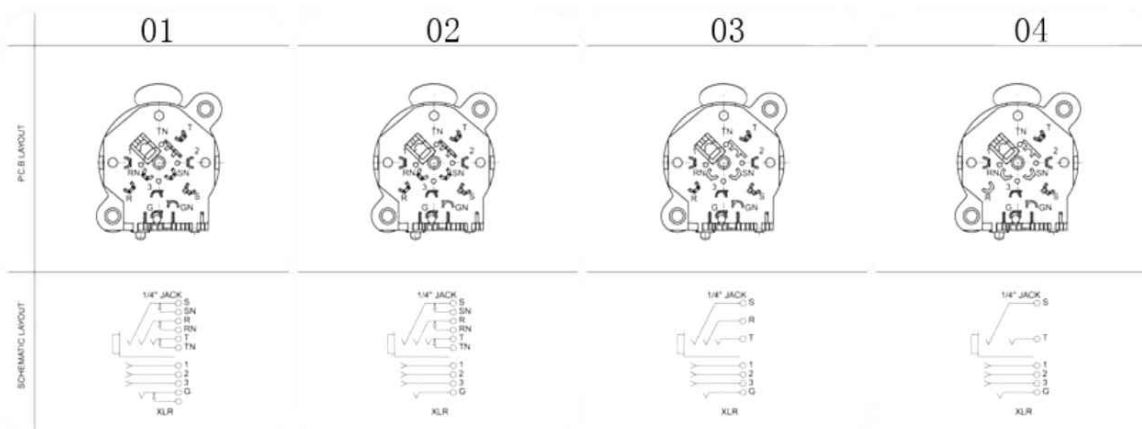

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:----
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

XLR Socket

THIRD ANGLE PROJECTION



RHTAYLR-S18-01