



1 2 3 4 5 6 7 8 9

A

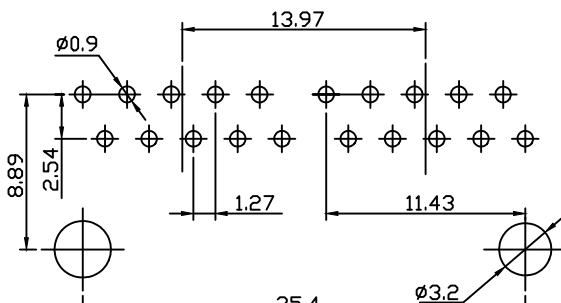

PCB Layout

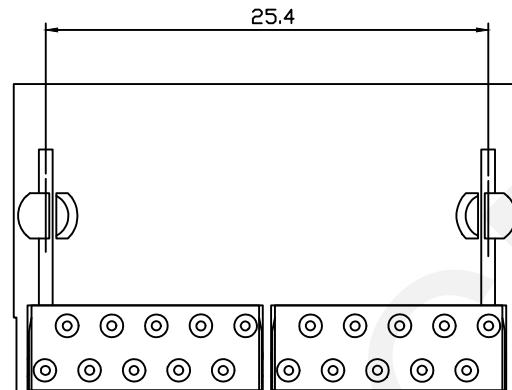

Material:

Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze Ø0.46mm
Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C~+70°C

Order Information

RHTLY02-10P10C-1x2-1-XX

Contacts: 10P10C, 8P8C

Color Code: 1-Black

Plating Code:


01-Fu" Gold Plating

02-3u" Gold Plating


03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

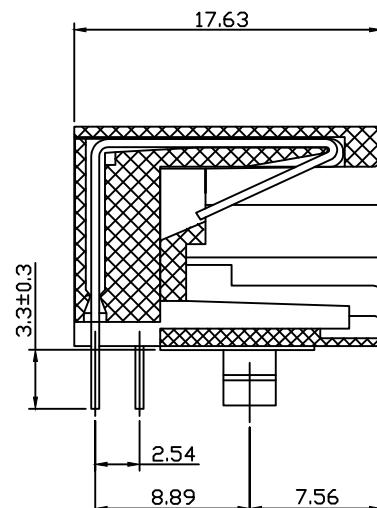

SECTION

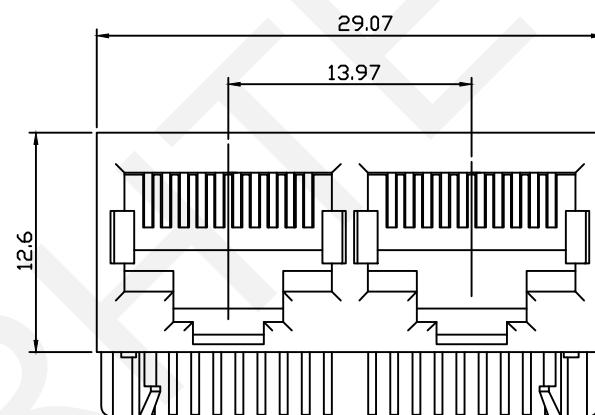

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks, RJ50-XPXC 1x2 without Shield

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTLY02-XPXC-1x2-1-XX

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G