


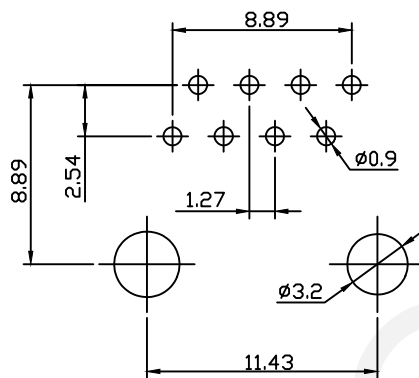


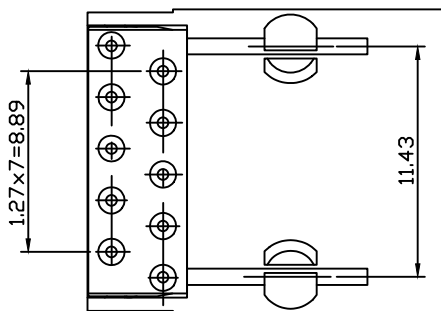

PCB Layout

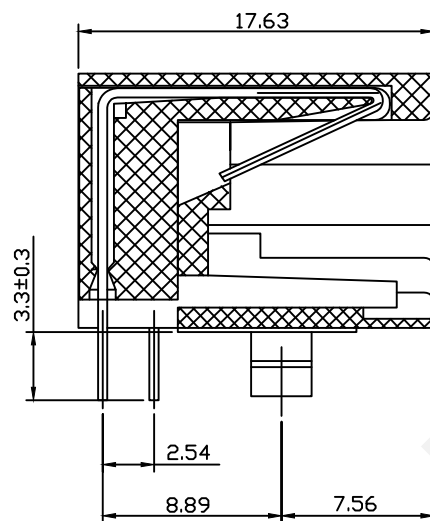

SECTION

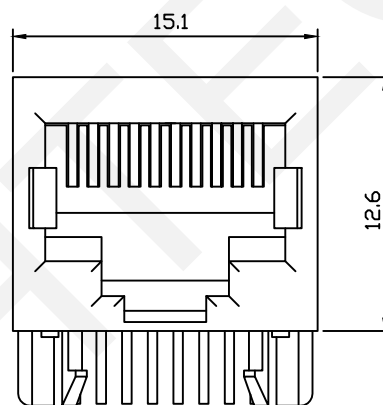

Material:  
Housing: PBT+Glass Filled Polyester  
Flammability Rating: UL94V-0  
Contacts: Phosphor Bronze  $\phi 0.46\text{mm}$   
Plating: Gold Plating

Electrical:  
Voltage Rating: 125VAC  
Current Rating: 1.5A  
Contact Resistance:  $30\text{m}\Omega$  Max.  
Insulation Resistance:  $500\text{M}\Omega$  Min.  
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.  
Durability: 600 cycles Min.  
Operation Temperature:  $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

#### Order Information

RHTLY02-10P10C-1-XX

Contacts: 10P10C, 8P8C

Color Code: 1-Black

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks,RJ50-10PXC 1x1 without Shield

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


$\pm 0.12$

$\pm 0.15$

$\pm 0.3$

$\pm 0.5$

APPR BY ZHAN



RHTLY02-XPXC-1-XX