
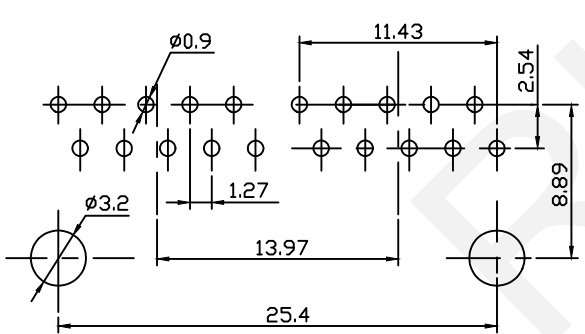
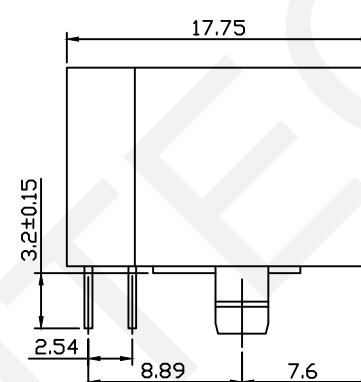
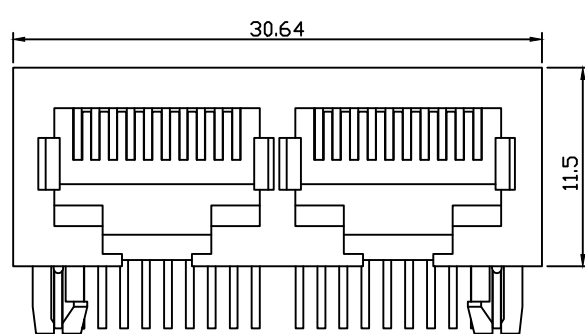


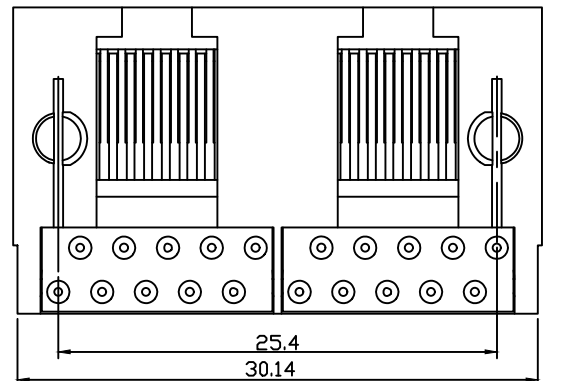


PCB Layout

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating:Gold Plating

Electrical:
Voltage Rating:125VAC
Current Rating:1.5A
Contact Resistance:30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength:1000VAC Rms 50Hz,1 Min.
Durability:600 cycles Min.
Operation Temperature:-40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information

RHTLY12-10P10C-1x2-1-XX

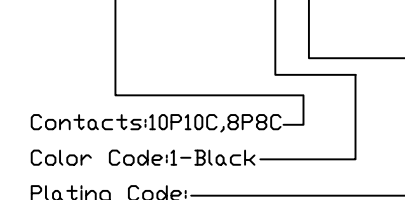

Contacts:10P10C,8P8C

Color Code:1-Black

Plating Code:


- 01-Fu" Gold Plating
- 02-3u" Gold Plating
- 03-6u" Gold Plating
- 04-15u" Gold Plating
- 05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

RJ50-XPXC 1x2 Modular jacks



RHTLY12-XPXC-1x2-1-XX