

PCB Layout

Material:
Housing:PBT+Glass Filled Polyester
Flammability Rating:UL94V-0
Contacts:Phosphor Bronze Ø0.46mm
Plating:Gold Plating

Electrical:

Voltage Rating:125VAC

Current Rating:1.5A

Contact Resistance:30mΩ Max.


Insulation Resistance: 500MΩ Min.

Dielectric Strength:1000VAC Rms 50Hz,1 Min.

Durability:600 cycles Min.

Operation Temperature:-40℃~+70℃

Order Information
RHTLY12-10P10C-1x8-1-XX

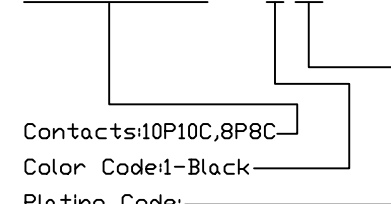

01-Fu" Gold Plating
02-3u" Gold Plating
03-6u" Gold Plating
04-15u" Gold Plating
05-30u" Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

RJ50-XPXC 1x8 Modular jacks


0~3

3~18

18~50 50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTLY12-XPXC-1x8-1-XX

 ± 0.12 $\pm 0,15$

$\pm 0,3$	$\pm 0,5$
-----------	-----------

APPR BY ZHAN