


PCB Layout

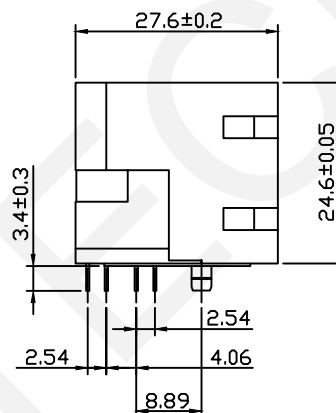

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating: Gold Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40 $^{\circ}\text{C}$ ~+70 $^{\circ}\text{C}$

Order Information
RHTLY03-8P8C-2x6-XX

Contacts: 8P8C
Plating Code:
01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks,RJ45-8P8C
jack, 2x6 Without Shell

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLY03-8P8C-2x6-XX


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9