

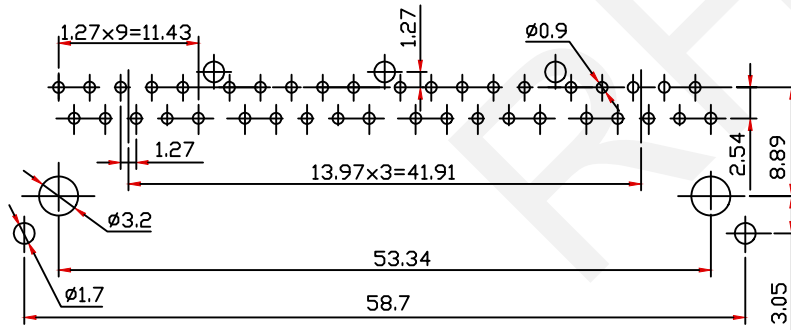
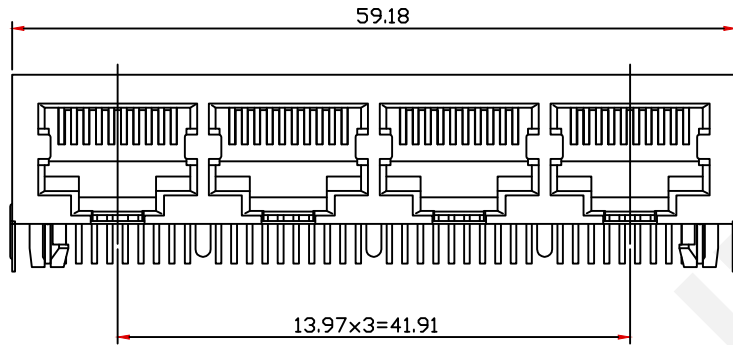


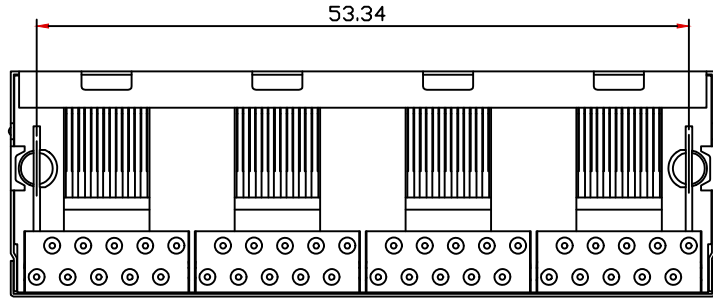

PCB Layout

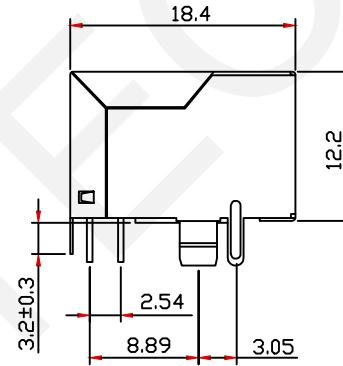

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\varnothing 0.46\text{mm}$
Plating: Gold Plating
Shield: Brass, Tin Plating

Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: $30\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ $+70^{\circ}\text{C}$

Order Information
RHTLY16-10P10C-1x4-F-1-XX

Contacts: 10P10C, 8P8C
Shield Code: _____
F-with Shield
Shield Peg Code: _____
1-Front 3.05mm
Plating Code: _____
01-Fu' Gold Plating
02-3u' Gold Plating
03-6u' Gold Plating
04-15u' Gold Plating
05-30u' Gold Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Modular jacks,RJ50-XPXC 1x4 with Shield

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTLY16-XPXC-1x4-F-1-XX


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9