
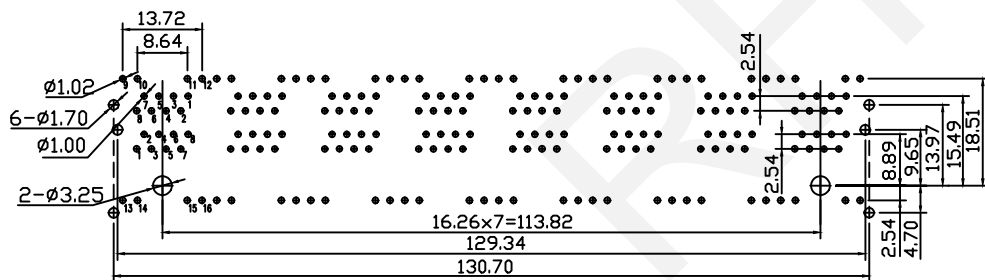
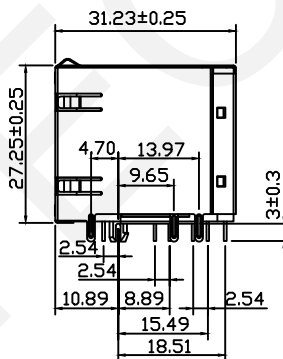


LED R GREEN LED L YELLOW
 9 → 10 11 → 12
 LED R GREEN LED L YELLOW
 13 → 14 15 → 16

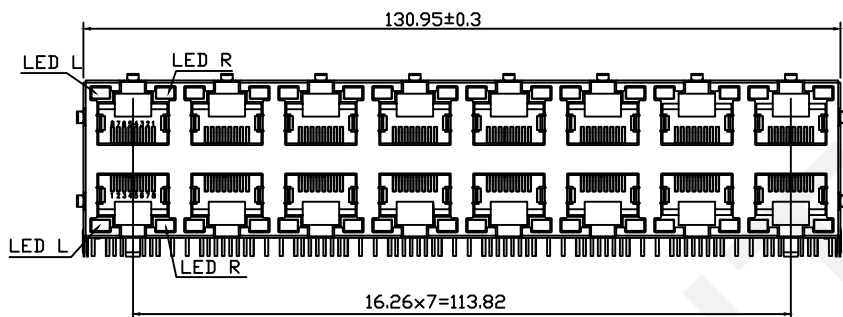

Recommended PCB Layout
 Tolerance: ±0.05mm

Notes.

- Material.
 Insert: UI94V-0
 Contact: Diameter 0.46mm C51000(QSn4-0.3)
 Phosphor Bronze Gold Plating Over Nickel
 Shield: 0.20mm Thickness H65Y Brass Nickel Plated
- Electrical
 Voltage Rating: 125 VAC
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min @500VDC
 Dielectric Strength: 1000V AC 50Hz or 60Hz, 1Min
 Mating/Unmating Force: 2.2KGF Max
 Retention Strength: 3.0KGF Min Between Jack And Plug
 Operating Life: 750 Cycles Min
 Storage: -40°C~+85°C Relative Humidity <70%
 Operation: -40°C~+85°C

Order Information

RHTLY13-8P8C-2x8-2-G/Y-01

Point NO.
 8P8C Point
 Ports:
 2x8-16 Ports
 Shield Code:
 2-with EMI Shield
 LED: G/Y-Green/Yellow
 Gold Thickness
 01-Fu" 02-3u"
 03-6u" 04-15u" 05-30u"

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

Modular jacks RJ45-8P8C
 2x8 With Shell, with LED

THIRD ANGLE PROJECTION

RHTLY13-8P8C-2x8-2-G/Y-01