


Ø2.5 SPECIAL MATE PLUG

MODEL NO.	RHTAY20PJ2.5-004
SCHEMATIC	

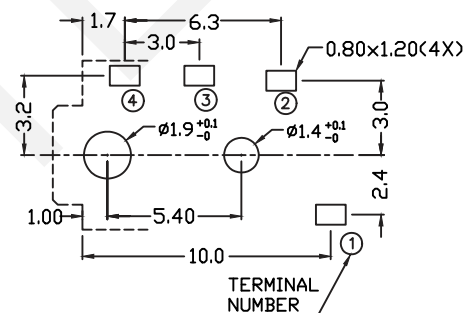

PCB LAYOUT
(BOTTOM MEW)

Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2~20 N
 Life: 50000 times
 Operating Temperature:-30°C~70°C
 Material:
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Housing : PA66

ORDER INFORMATION
 RHTAY20PJ2.5-004

2.5 SMD Stereo Jack Type

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

SMD Stereo Jack

THIRD ANGLE PROJECTION



RHTAY20PJ2.5-004