



A DETAIL COPLANARITY



Ø2.5 MATE PLUG

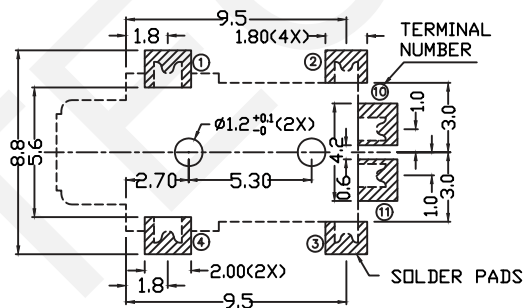

RECOMMENDED
SOLDER PAD LAYOUT

Technical parameters:
Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force: 2-20 N
Life: 50000 times
Operating Temperature: -30°C~70°C
Material:
Housing/Cover: PA66
Terminal 1: Brass
Terminal 2: Copper Alloy
Terminal 3: Copper Alloy
Terminal 4: Copper Alloy
Terminal10: Brass
Terminal11: Brass
Housing: PA6T

MODEL NO.	RHTAY20PJ2.5-007	RHTAY20PJ2.5-007A	RHTAY20PJ2.5-007B	RHTAY20PJ2.5-007C
SCHEMATIC				

ORDER INFORMATION

RHTAY20PJ2.5-007A

2.5 SMD Stereo Jack

Schematic: See Annex

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

SMD Stereo Jack

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY20PJ2.5-007


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9