


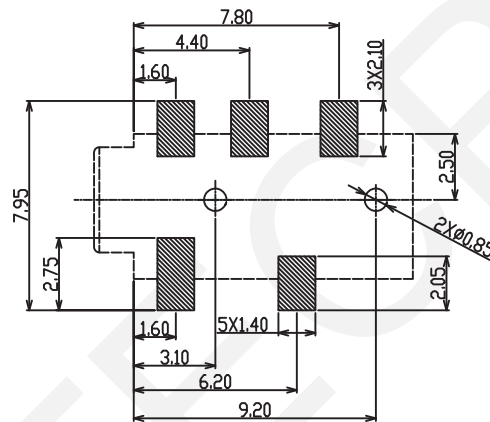

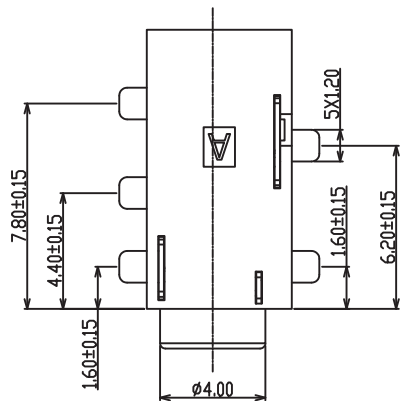
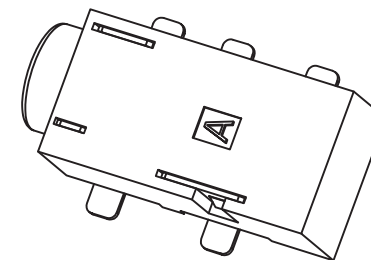




PCB LAYOUT TOP VIEW



Technical parameters:
 Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C~70°C
 Material:
 Terminal 1 :Phosphor Bronze T=0.20 Au-Plated
 Terminal 2 : Phosphor Bronze T=0.20 Au-Plated
 Terminal 3 : Phosphor Bronze T=0.25 Au-Plated
 Terminal 4 : Phosphor Bronze T=0.20 Au-Plated
 Housing : PA-9T(Black)



CIRCUIT DIAGRAM

ORDER INFORMATION
 RHTAY20PJ2.5-009

2.5 SMD Stereo Jack
 Serial number

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

SMD Stereo Jack	
THIRD ANGLE PROJECTION	RHTAY20PJ2.5-009