
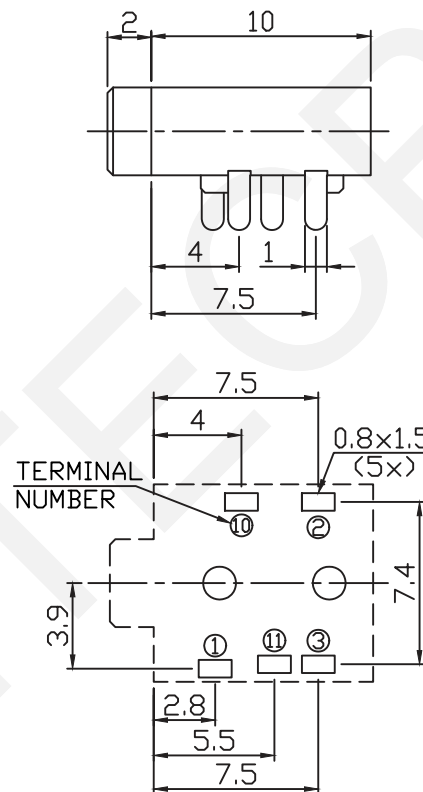




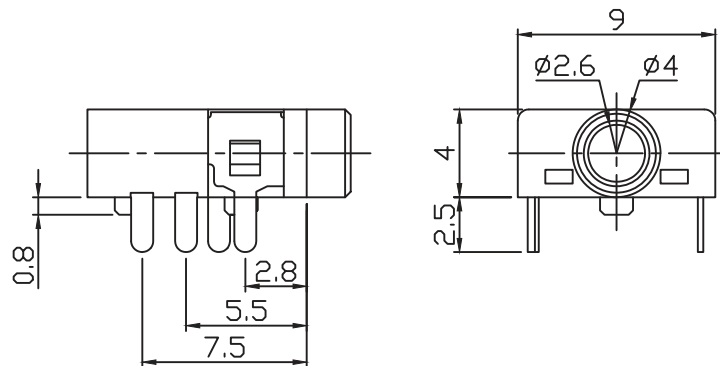

PCB LAYOUT
(TOP VIEW)

Technical Parameters:
Rated Voltage:DC 30V
Rated Current: 0.5 A
Contact Resistance:0.03Ω,Max
Insulation Resistance:100MΩ,Min
Pressure:AC500V(50Hz)/1minute
Insertion Force:2-20 N
Life: 50000 Times
Operating Temperature:-30℃~70℃
Material:
Terminal1:Copper Alloy
Terminal2:Copper Alloy
Terminal3:Copper Alloy
Terminal10:Brass
Terminal11:Brass
Housing:PA66
Cover:PA66

ORDER INFORMATION
RHTAY20SJ2.5-003A

2.5mm Dip Stereo Jack
Schematic See Annex

MODEL NO.	003	003A	003B	003C	003D
SCHEMATIC					

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Dip Stereo Jack

THIRD ANGLE PROJECTION

RHTAY20SJ2.5-003