



Ø2.5 MATE PLUG

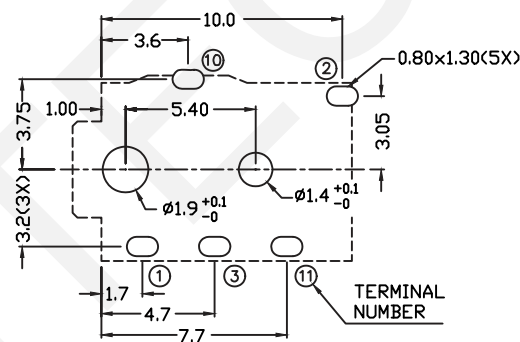

PCB LAYDUT
<BOTTOM VIEW>

Technical Parameters:
Rated Voltage:DC 30V
Rated Current: 0.5 A
Contact Resistance:0.03Ω,Max
Insulation Resistance:100MΩ,Min
Pressure:AC500V(50Hz)/1minute
Insertion Force:2~20 N
Life: 50000 Times
Operating Temperature:-30℃~70℃
Material:
Terminal1:Copper Alloy
Terminal2:Copper Alloy
Terminal3:Copper Alloy
Terminal10:Brass
Terminal11:Brass
Housing :PA66

ORDERINFORMATION
RHTAY20SJ2.5-004A

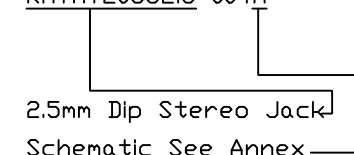

MODEL NO.	004	004A	004B	004C	004D
SCHEMATIC					